



Turn Around

by
Carlotta de Bevilacqua

Artemide[®]

turn around

Turn Around

Carlotta de Bevilacqua
2019

Turn Around inverts the approach to the light system, starting from the principles of sustainability, reduction, lightness, integration, optoelectronic intelligence, application freedom and interaction. It is a combination of different structural and lighting solutions that adapt to last-minute space thanks to its minimal section. It is a composition based on a very small track, with a patented section dictated by the standard thickness of plasterboard, meaning it can be inserted into the available space in any situation. Various linear, 90° angle and curved modules can be combined with electrical and mechanical continuity, availing of the utmost freedom to create ever different shapes.

→ PATENT OF INVENTION: ELECTRO-MECHANICAL SECTION
→ PATENT OF INVENTION: SHARP



Artemide
App



For further information on Turn Around
↪ visit [artemide.com](https://www.artemide.com)



Turn Around is an innovative system

The freedom to design light in space is ensured by the flexibility to combine different geometries within the structure and also by the possibility to integrate different performances.

Indeed, the same track can accommodate a linear module for diffused light, plus sharpening, spot and suspension modules.



Turn Around
is extremely
flexible



→ Geometrical flexibility

→ Performance flexibility

→ Management flexibility

Reduce to innovate

→ Energetic Infrastructure


A single continuous energetic infrastructure that accommodates various light performances.

→ 48V

Powered at 48V, there are no practical length limits of the system but only of installed power.

→ Electronic Bridge

An “invisible” joint permits to transfer power and D.Art from one section to the following allowing the possibility to insert endless diffused flexible modules.

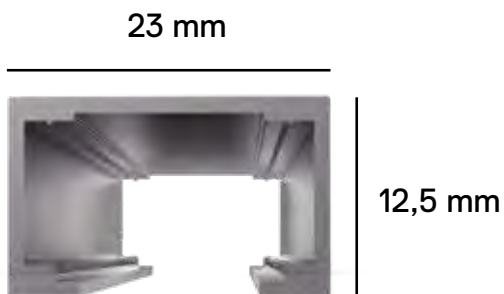




Asserting one's spatial freedom

Challenging the fundamental sustainability

- h 12.5 X 23 mm for **Recessed version**
Profile dimensions can be integrated into the standard plasterboard thickness without interfering with the structural warping.
- **Recessed / SMD / Suspension**
The profile is integrated into the space in the built-in, ceiling and suspension versions.

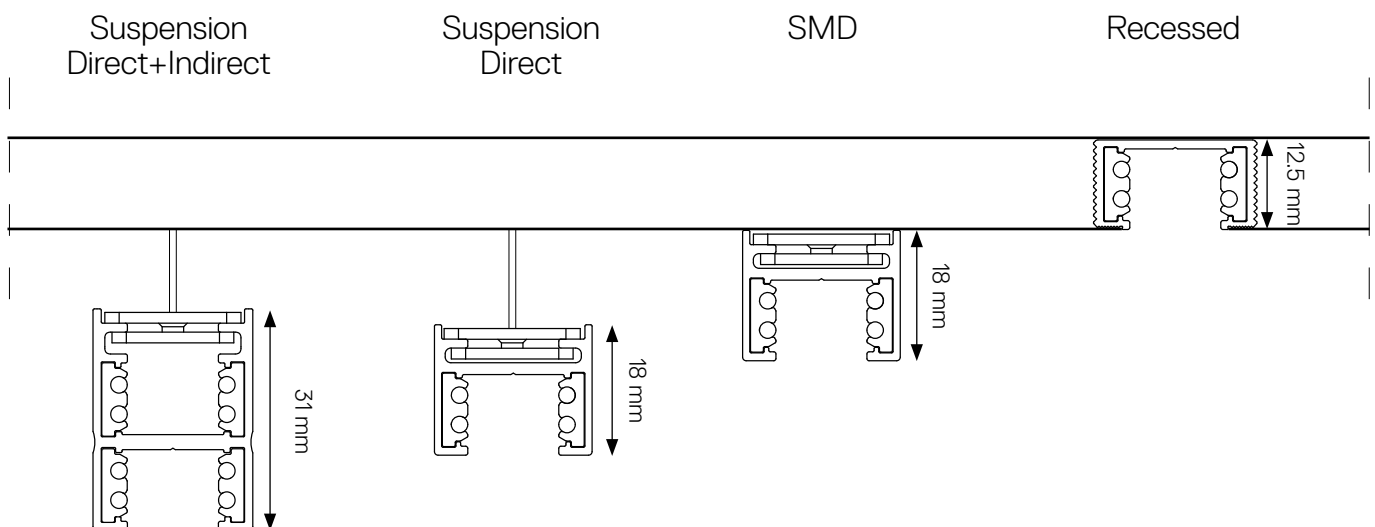


→ False ceiling scheme

Structural Warping

Structural Warping

Plasterboard - 12.5 mm
thickness

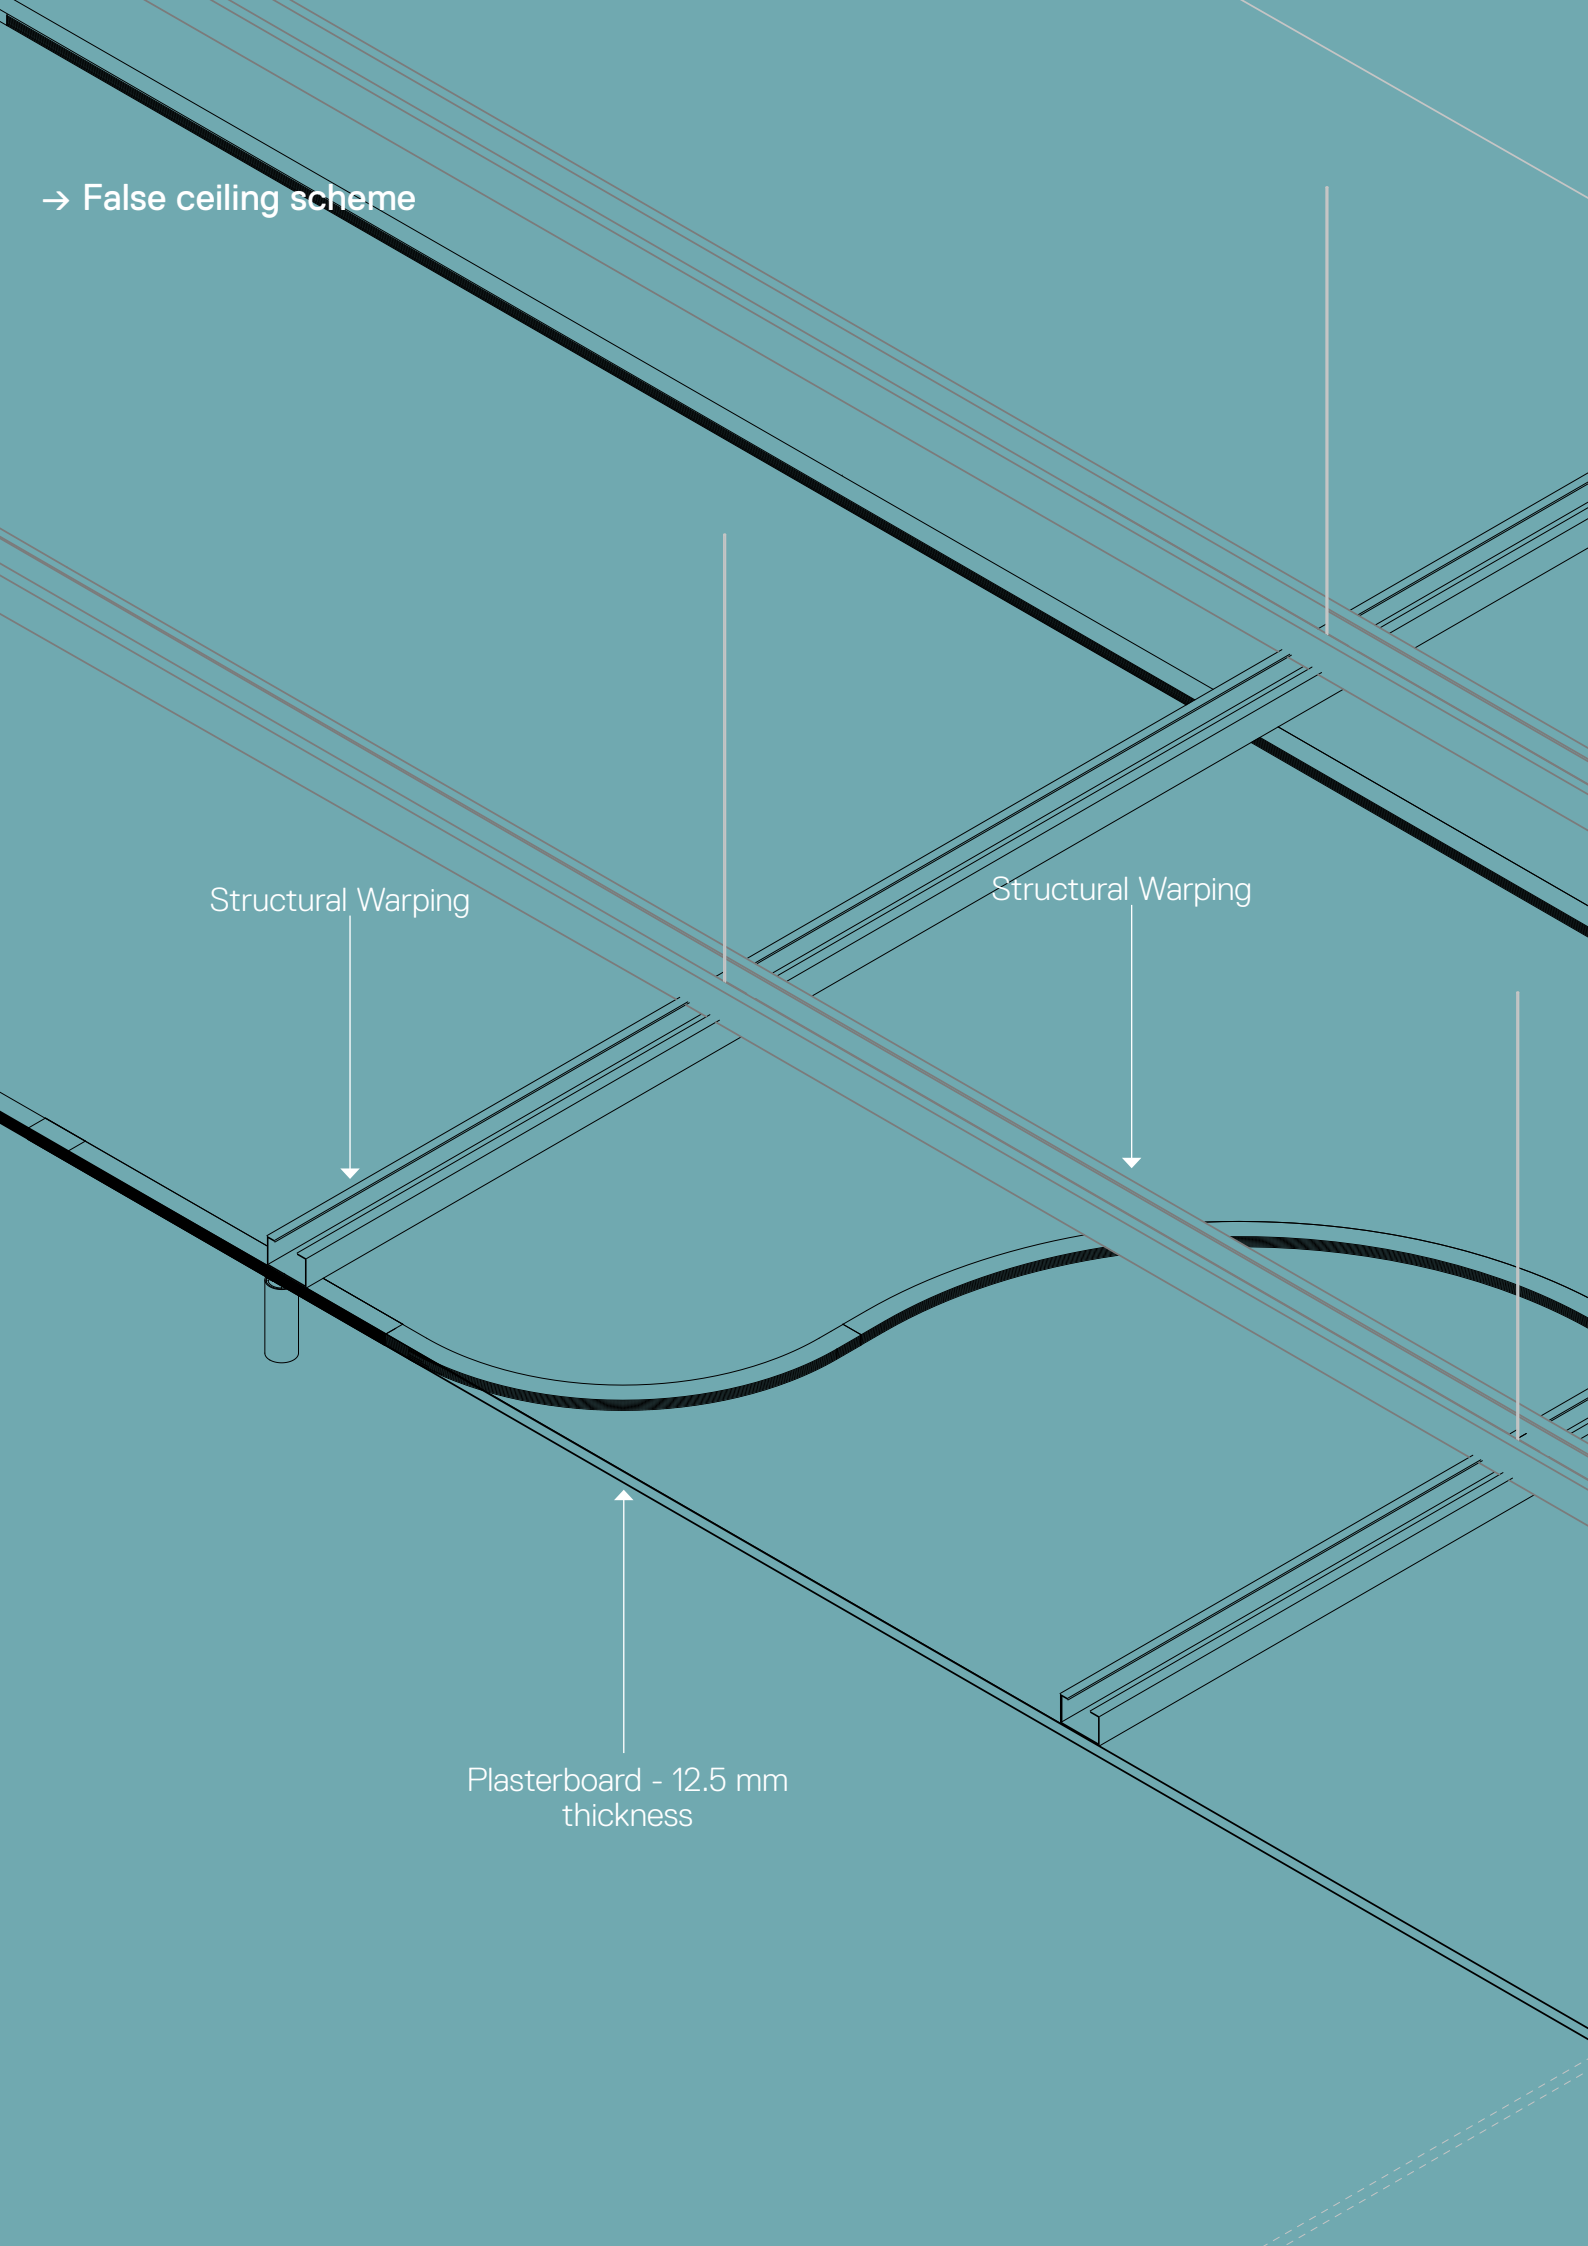

Turn Around infrastructure

Integrating different performances

Track 48V

23 x h 12,5 mm (Recessed)

22 x h 18 mm (SMD, Suspension Direct)

22 x h 31 mm (Suspension Direct+Indirect)


1000/2000/3000 mm

- Black (Recessed)
- Titanium (SMD, Suspended)

Angular and curved elements


Curves: 90°

Rays: 700 mm, 450 mm, 270 mm

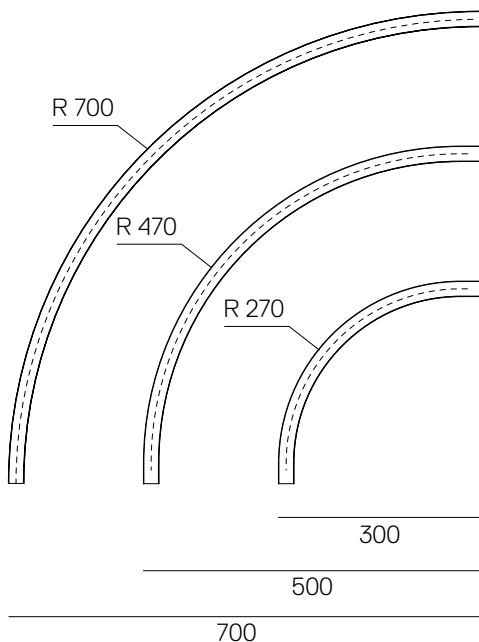

Curves: 60°

Rays: 700 mm, 450 mm, 270 mm

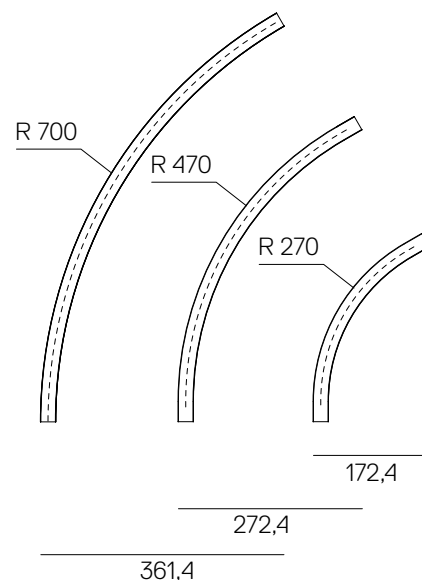

Linear elements Recessed



1000 mm

2000 mm

3000 mm

Linear elements SMD - Suspension direct emission



1000 mm

2000 mm

3000 mm

Linear elements Suspension direct + indirect emission




1000 mm

2000 mm

3000 mm


Curves: 45°

Rays: 700 mm, 450 mm, 270 mm

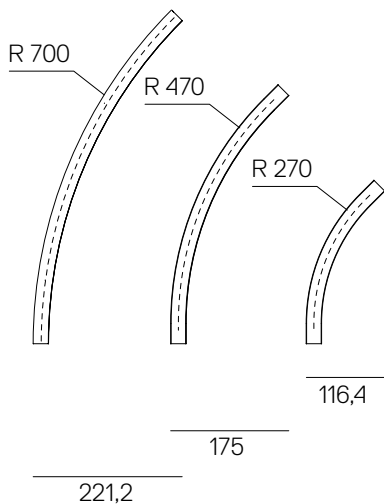


90° Angle

same plane recessed




90° Angle

same plane
suspension direct
emission and SMD



90° Angle

same plane
suspension direct +
indirect emission




One body for all the light appliances



Vector Track

Vector Pendant

Square

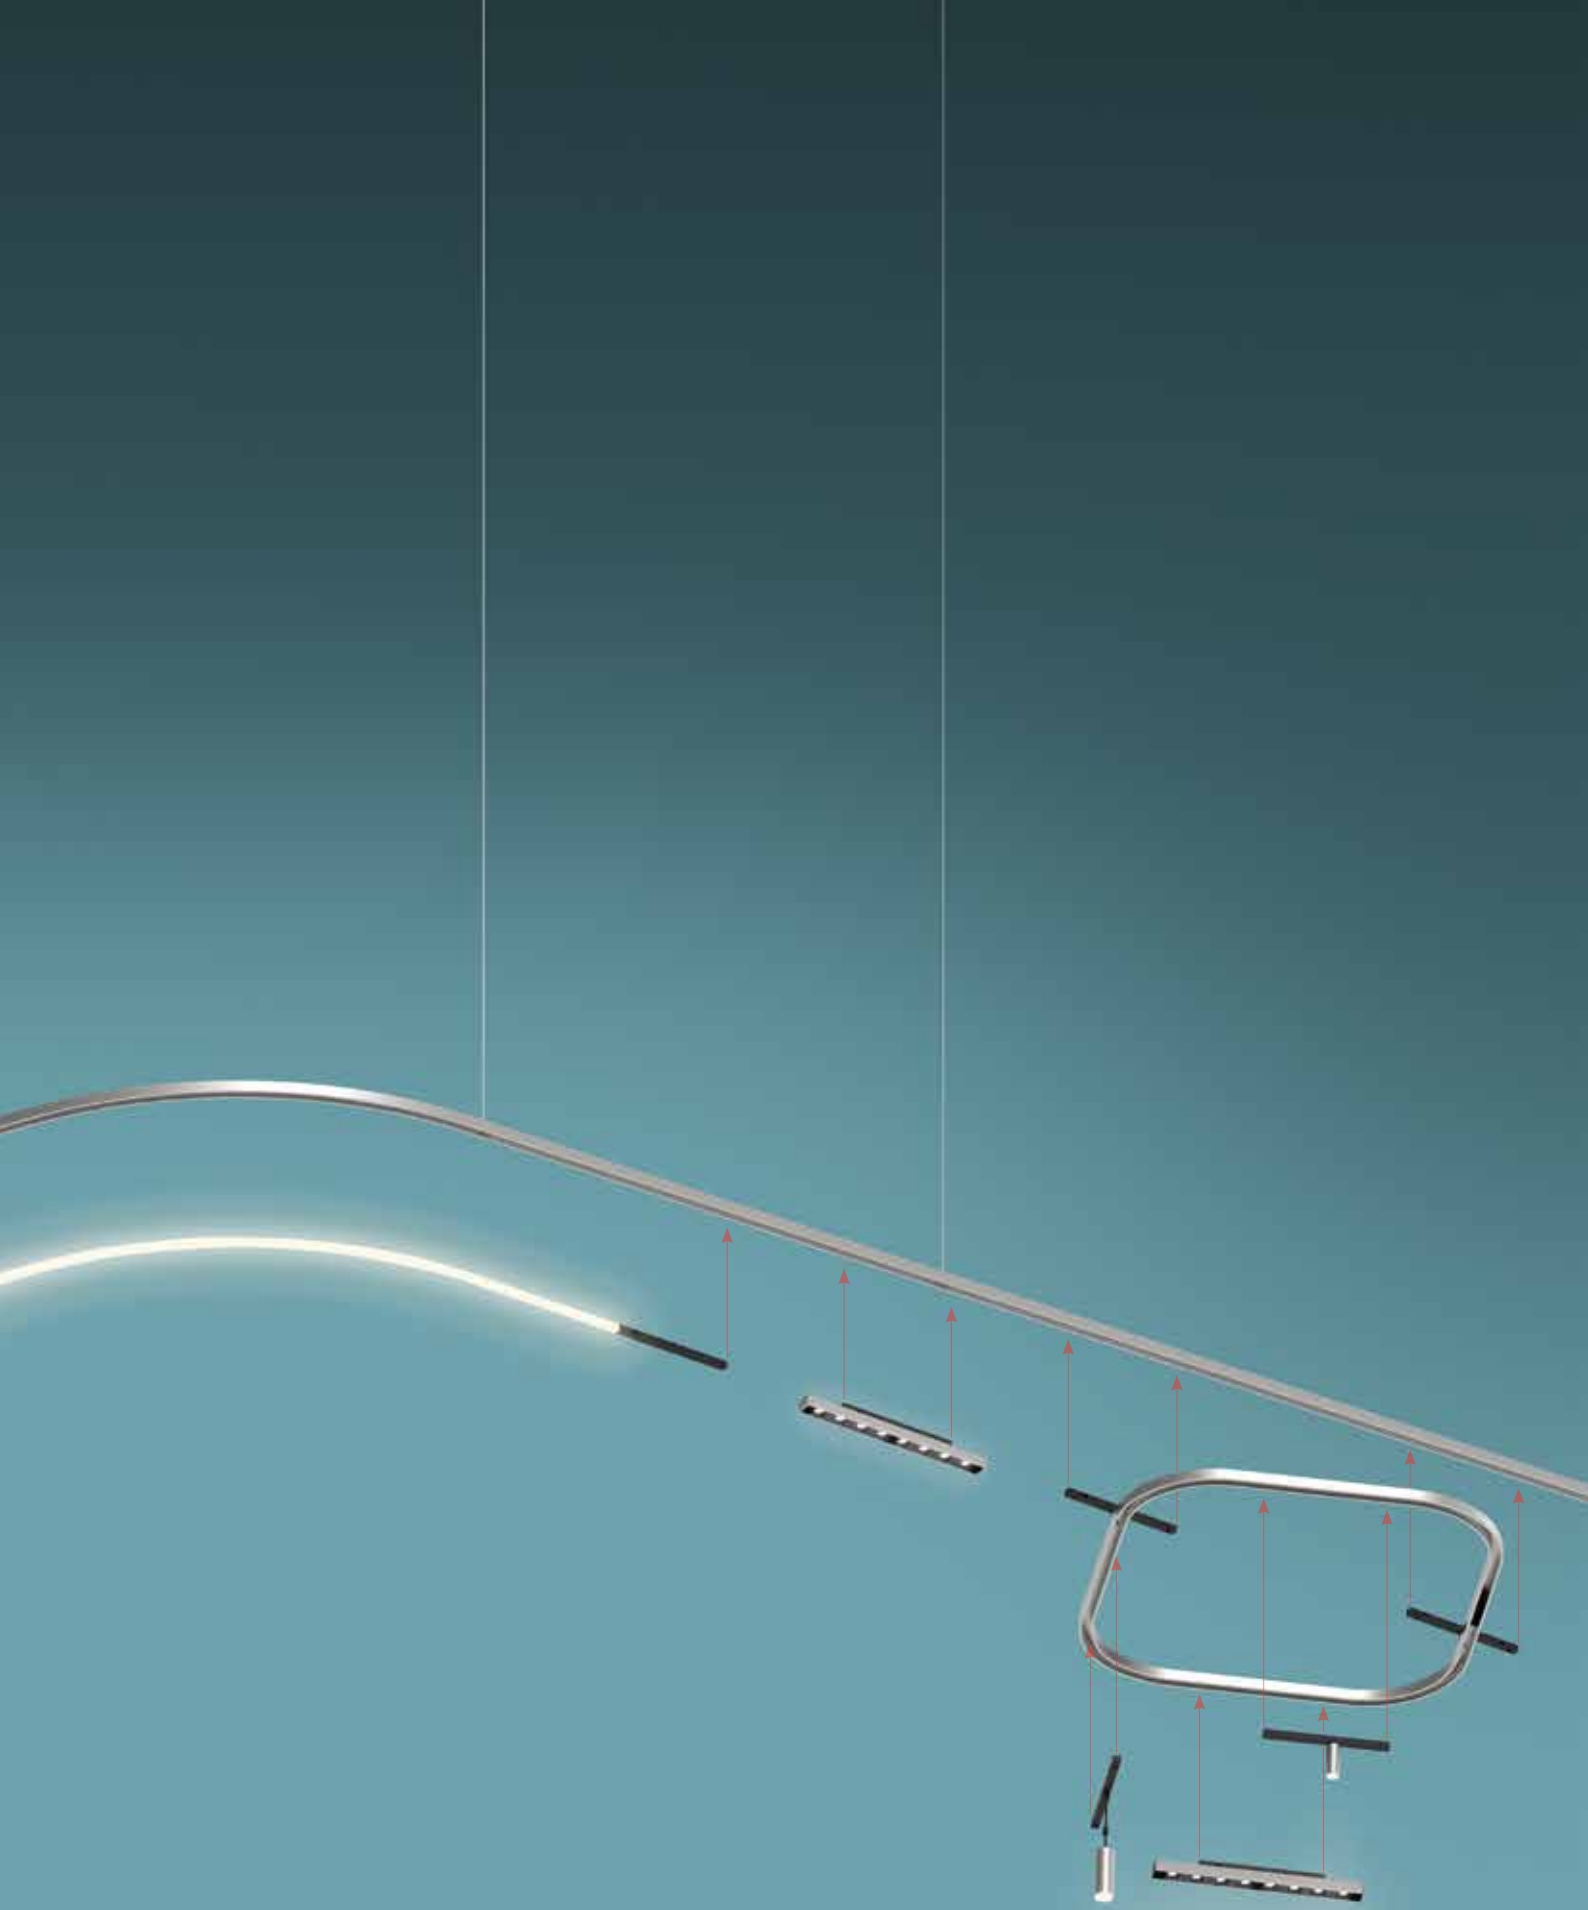

Diffused Flexible Module

Sharp or Diffused
Linear Module


Square Track
+ Vector Track
+ Vector Pendant
+ Sharp

Turn Around light appliances

Integrating different performances

Diffused flexible module

15 x h 10 mm
542 lm/m installed
8,5 W/m
3000 K
Max length 4,5 m




Vector 30 Pendant

Ø 30 x h 77 mm
335 lm* - 7 W

Vector 40 Pendant

Ø 40 x h 103 mm
584 lm* - 10 W

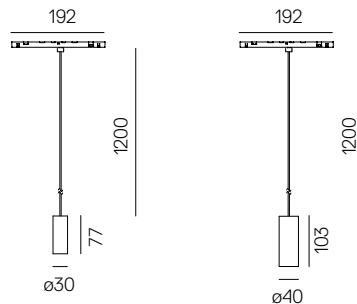

Vector 20


Ø 20 x h 50 mm
180 lm* - 3,5 W

Vector 30

Ø 30 x h 77 mm
335 lm* - 7 W

Vector 40

Ø 40 x h 103 mm
584 lm* - 10 W




Sharp 8

315 x 27 x h 20 mm
1071 lm* - 14 W



Sharp 12

464 x 27 x h 20 mm
1607 lm* - 19 W



* 3000 K values.

Diffused Linear Module 600



599 x 27 x h 20 mm

1442 lm* - 17 W

Diffused Linear Module 1200


1187 x 27 x h 20 mm

2884 lm* - 33 W

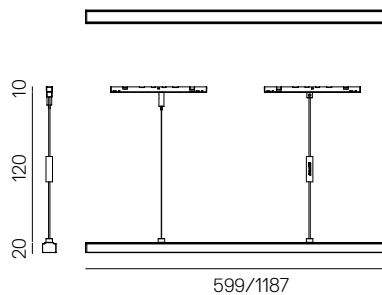

Horizontal Square - Track

590 x 590 x h 18 mm

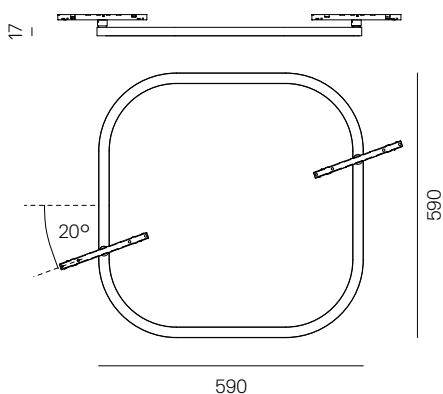


Horizontal Square - Diffused Strip LED

Diffused emission

590 x 590 x h 18 mm

976 lm

18 W

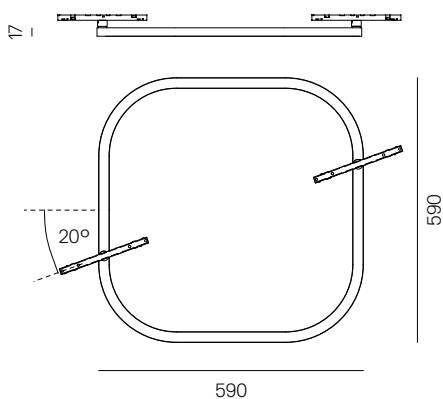


Vertical Square - Diffused Strip LED

Diffused emission

590 x 590 x h 18 mm

976


18 W

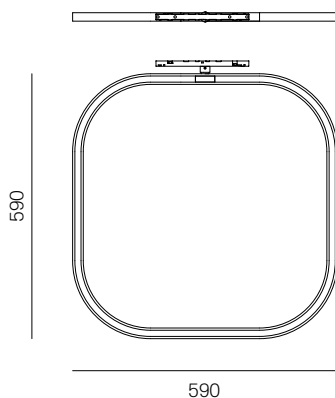

* 3000 K values.

Turn Around is powered at 48 Vdc

ELEVATION

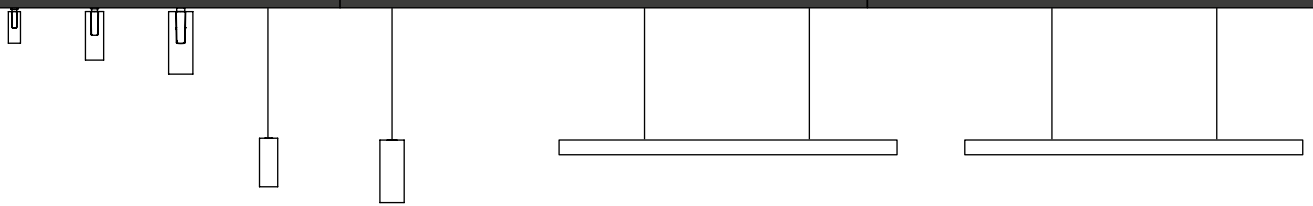

VECTOR 20

max 35 with 1 Power Supply 150W
max 60 with 1 Power Supply 240W
max 77 with 1 Power Supply 320W

VECTOR 30/VECTOR 30 PENDANT

max 17 with 1 Power Supply 150W
max 30 with 1 Power Supply 240W
max 38 with 1 Power Supply 320W

VECTOR 40/VECTOR 40 PENDANT

max 12 with 1 Power Supply 150W
max 21 with 1 Power Supply 240W
max 27 with 1 Power Supply 320W

DIFFUSED LINEAR MODULE 600

max 8 with 1 Power Supply 150W
max 14 with 1 Power Supply 240W
max 18 with 1 Power Supply 320W

DIFFUSED LINEAR MODULE 1200

max 4 with 1 Power Supply 150W
max 7 with 1 Power Supply 240W
max 9 with 1 Power Supply 320W

SHARP 8

max 8 with 1 Power Supply 150W
max 15 with 1 Power Supply 240W
max 19 with 1 Power Supply 320W

SHARP 12

max 6 with 1 Power Supply 150W
max 11 with 1 Power Supply 240W
max 14 with 1 Power Supply 320W

DIFFUSED


FLEXIBLE MODULE 2m

max 7 with 1 Power Supply 150W
max 12 with 1 Power Supply 240W
max 15 with 1 Power Supply 320W

FLEXIBLE MODULE 4,5m

max 3 with 1 Power Supply 150W
max 5 with 1 Power Supply 240W
max 7 with 1 Power Supply 320W


PLAN

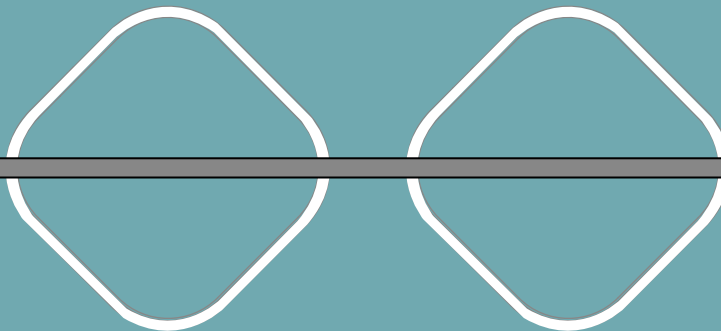

SQUARE INSETS

VECTOR 20, 30, 40
max 3

SHARP 8
max 3








Turn Around is safe

a unique feature developed for a real safe DALI interface.

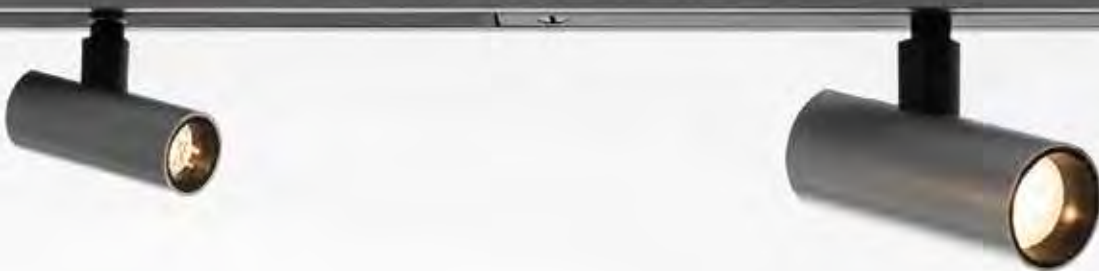

D.Art is a technology designed by Artemide that overcomes the safety limits of the DALI signal in devices where the same signal is accessible to the touch.

The DALI signal is transformed to a “SELV” safety extra low voltage ensuring the total safety of the appliance.

Turn Around has been designed in compliance with international certifications.



Asserting electronic intelligence

Reduce to innovate


→ Artemide APP


Real time freedom not only during installation but also in the interaction through Artemide App that manages the Dali addresses present in the system.



Artemide
App



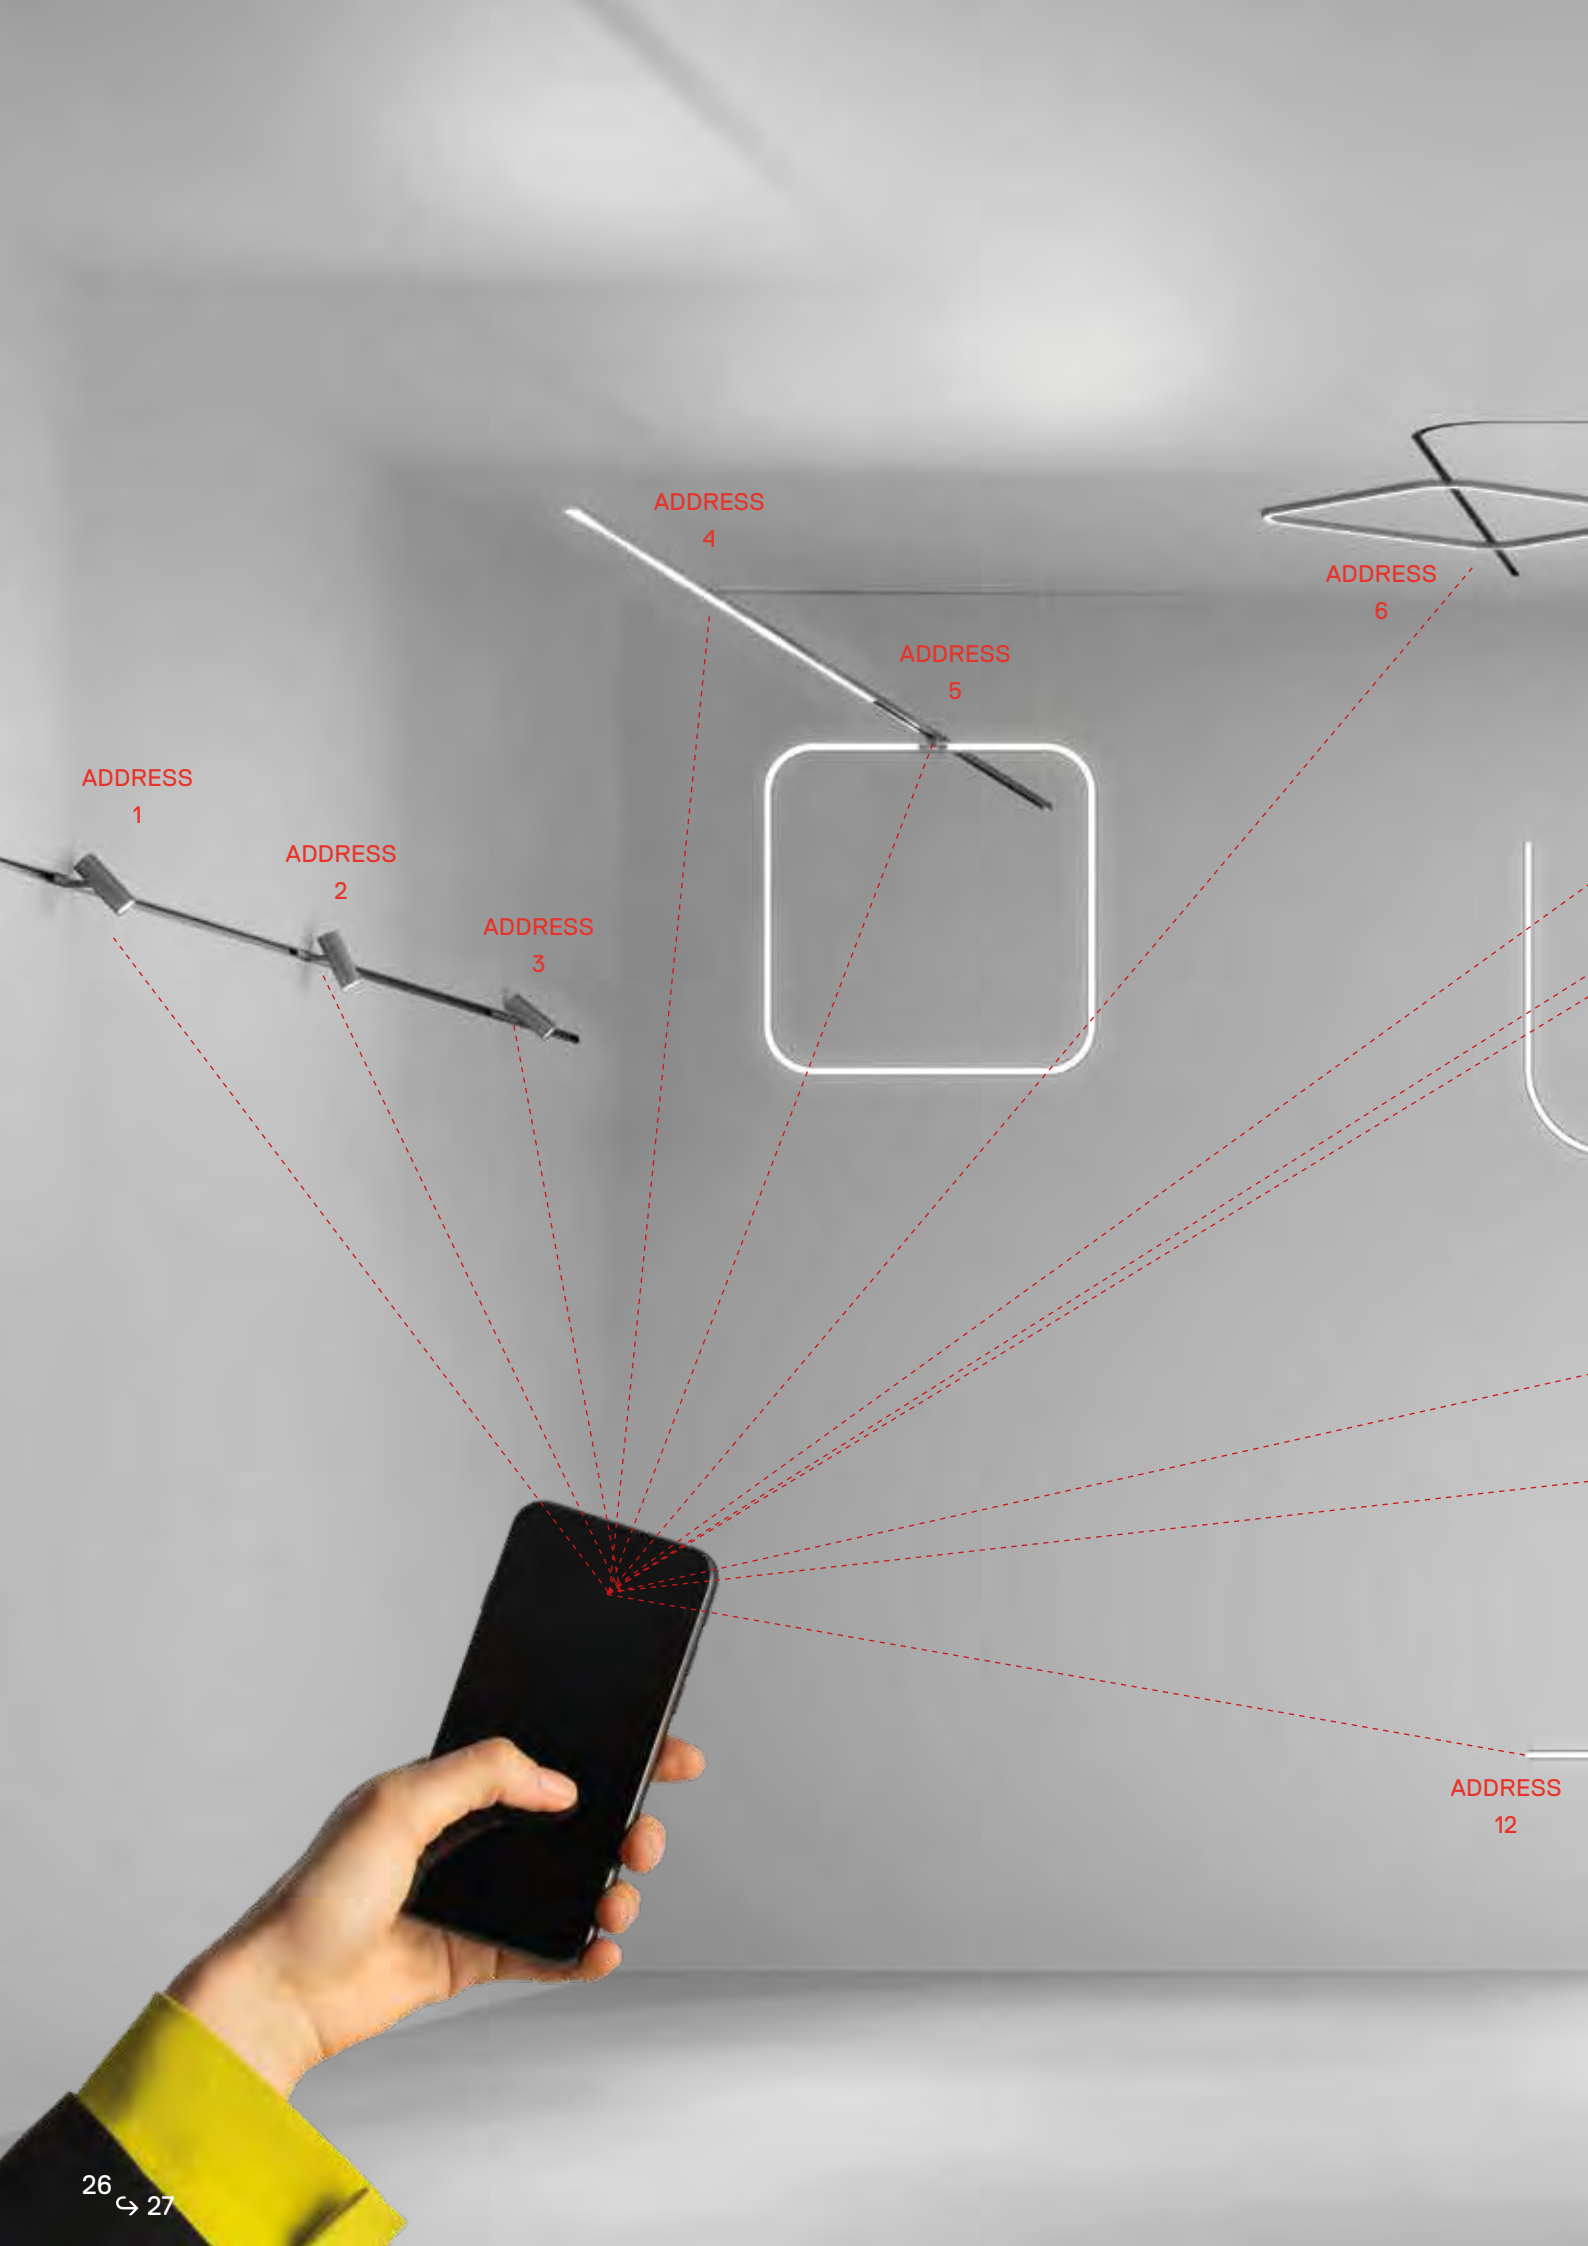

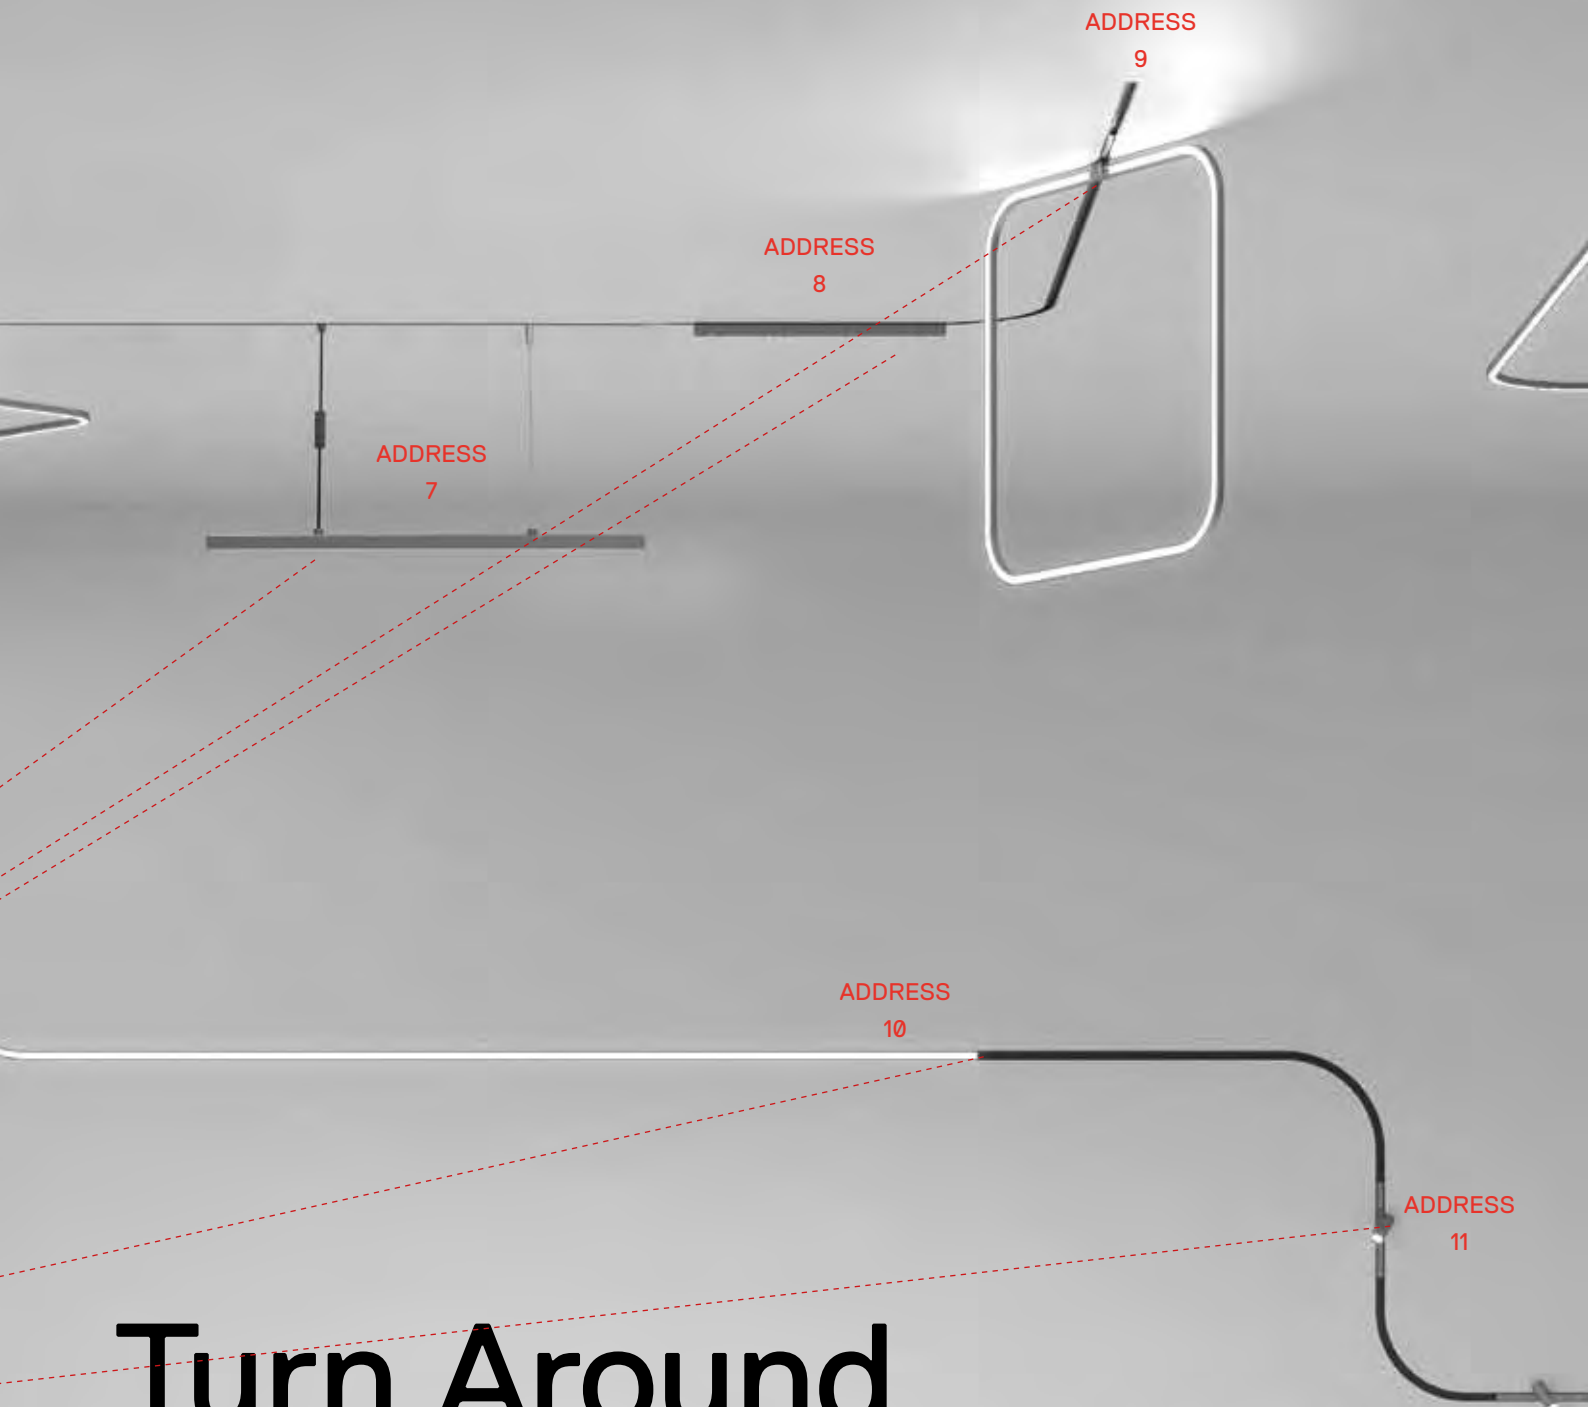

Turn Around is fully addressable

Each lighting appliance can be managed separately by Artemide App or by DALI control.

Turn Around power supply

CEILING
POWER SUPPLY
240W - 150W

RECESSED
POWER SUPPLY
320W - 240W - 150W

REMOTE BARE
POWER SUPPLY
240W - 150W


REMOTE BOX
POWER SUPPLY
320W - 240W

A


B

C


D

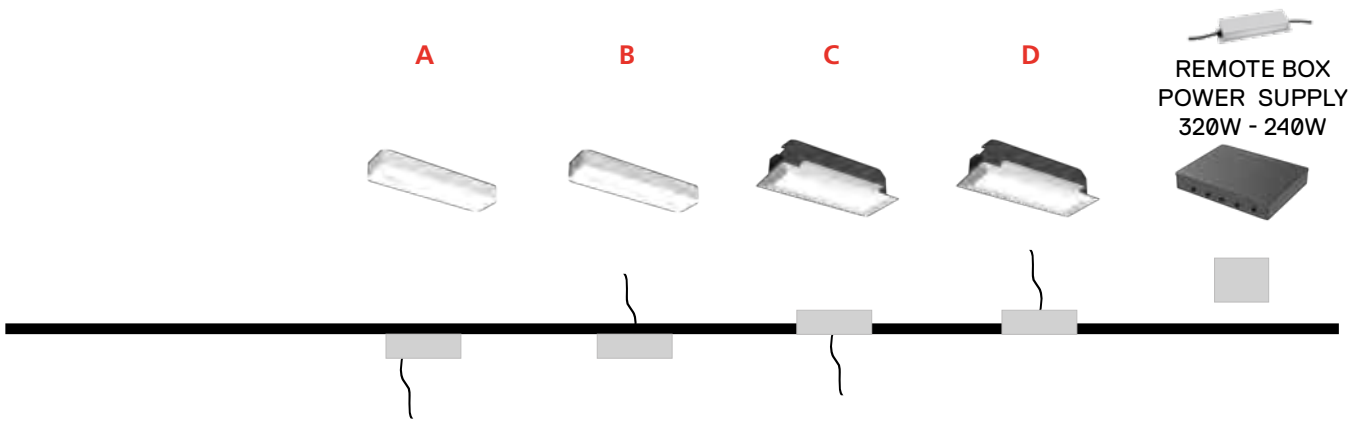


SUSPENSION









SMD




RECESSED



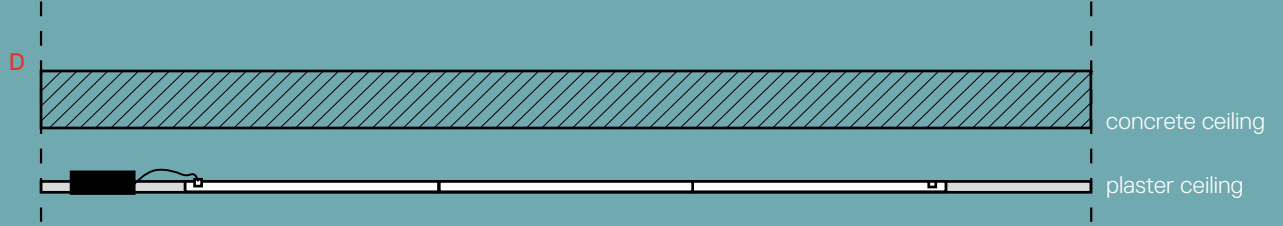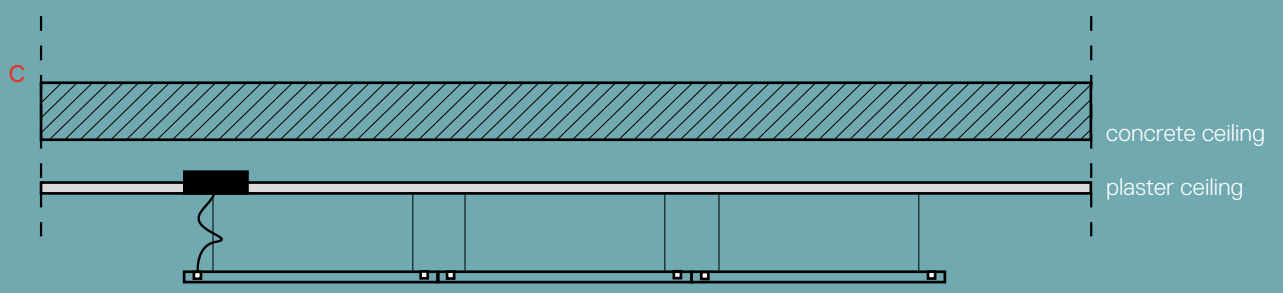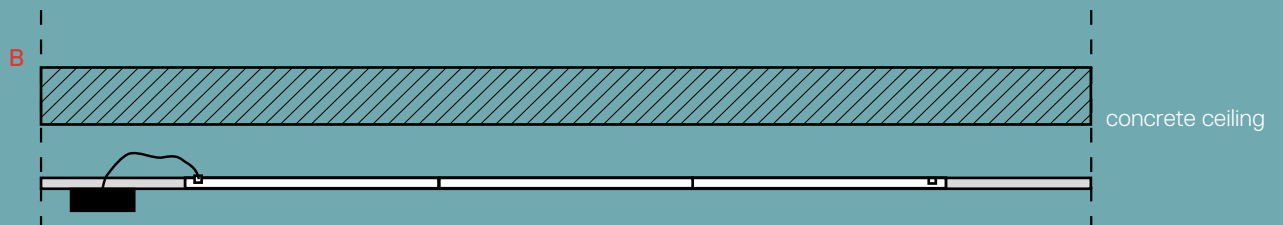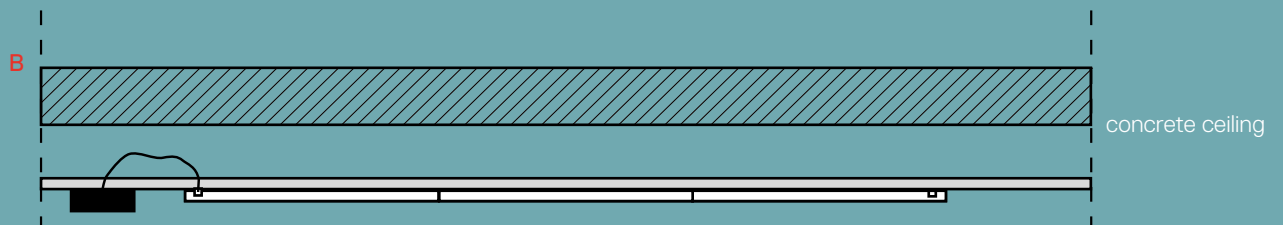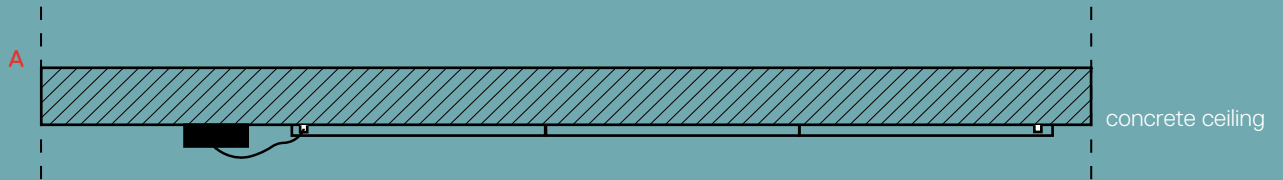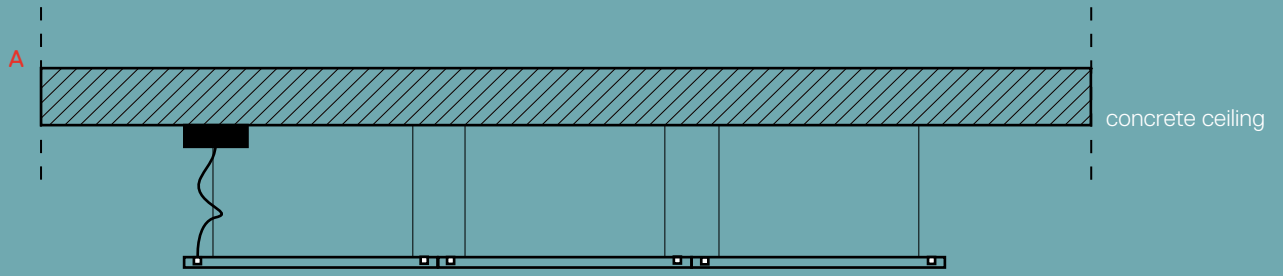

Turn Around structural track

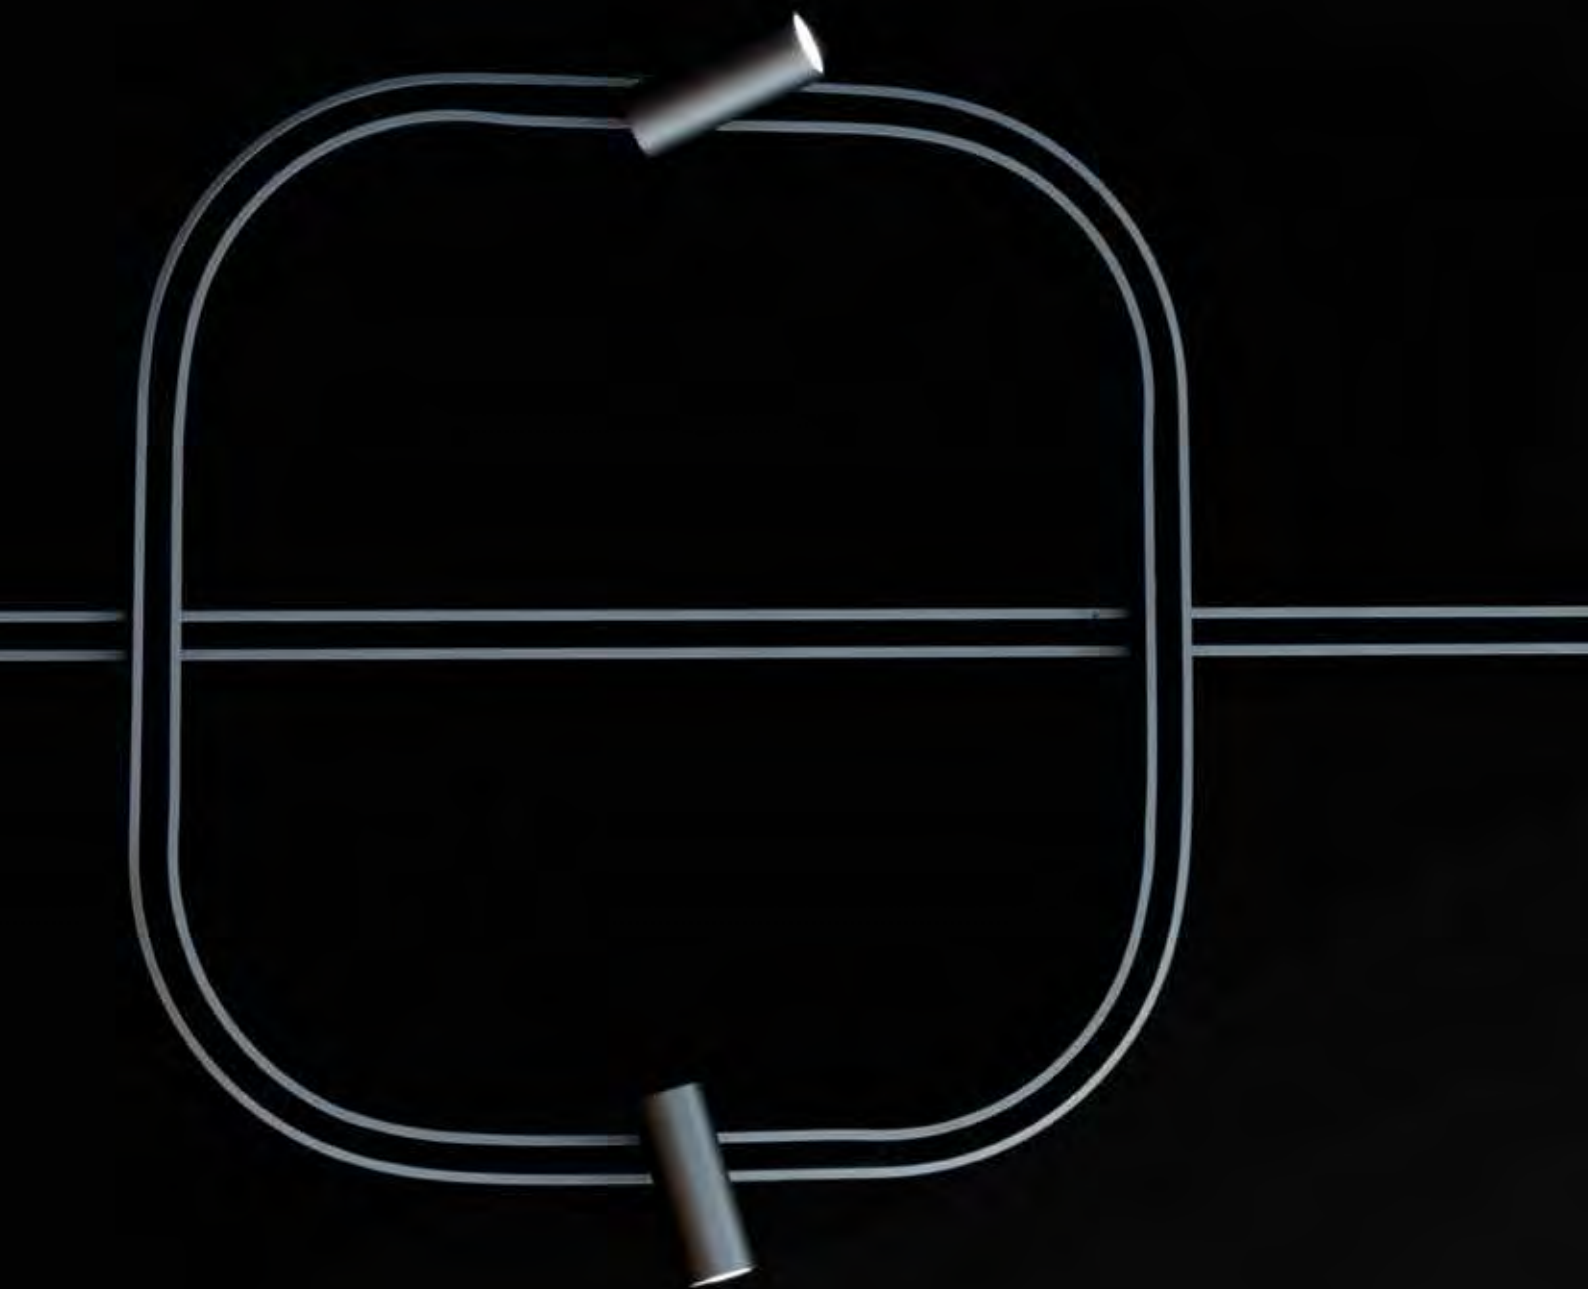

↪ TURN AROUND RECESSED TRACK

Black



IP20



Linear elements

Length

1000 mm
2000 mm
3000 mm

Code

TA00104
TA00204
TA00304





12,5
23

Angle elements

90° on same plane track angle elements
50 x 50 mm

Code

TA80004



Curved joining elements

Radius Angle

300 mm

45°

60°

90°

500 mm

45°

60°

90°

700 mm

45°

60°

90°

Code

TA30004

TA30304

TA30604

TA30104

TA30404

TA30704


TA30204

TA30504


TA30804




45°



60°



90°



Accessories



Fed end cap
Cable L= 2500mm

Code

TA90700



Recessed Fixing Kit (7pcs)
Linear element L= 3000mm uses 7pcs
Linear element L= 2000mm uses 5pcs
Linear element L= 1000mm uses 3pcs

TA90100



Electro-Mechanical Joint Kit

TA90000

Accessories for cutting components of linear elements

Shaping tool: to shape insulating conductor support

Code

TA00000




















Locking tool: to lock insulating conductor spacer into aluminum profile

TA00100


Note: no tools provided to cut aluminum profile.

White Titanium



Power supply	Undimmable Code	DALI/0-10/1-10/PUSH Code	Dimmable APP Code
 320W Recessed power supply kit for recessed modules 230VAC-48VDC IP20  395x165x107H	TA66001	TA66101	TA66101APP
 240W Recessed power supply kit for recessed modules 230VAC-48VDC IP20  395x165x107H	TA61901	TA62001	TA62001APP
 150W Recessed power supply kit for recessed modules 230VAC-48VDC IP20  395x165x107H	TA61701	TA61801	TA61801APP
 240W Ceiling power supply kit for recessed and ceiling modules 230VAC-48VDC IP20  400x110x50H	<input type="radio"/> TA60501 <input checked="" type="radio"/> TA60722	<input type="radio"/> TA60601 <input checked="" type="radio"/> TA60822	<input type="radio"/> TA60601APP <input checked="" type="radio"/> TA60822APP
 150W Ceiling power supply kit for recessed and ceiling modules 230VAC-48VDC IP20  400x110x50H	<input type="radio"/> TA60101 <input checked="" type="radio"/> TA60322	<input type="radio"/> TA60201 <input checked="" type="radio"/> TA60422	<input type="radio"/> TA60201APP <input checked="" type="radio"/> TA60422APP
 320W Remote box power supply kit 230VAC-48VDC IP20  313x243x57,5H		TA68000	TA68000APP
 240W Remote box power supply kit 230VAC-48VDC IP20  313x243x57,5H		TA62500	TA62500APP
 240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20  (1 feed connector) (for dimmable version to be combined with "DV1061") 244x68x38H	TA98000		
 150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20  (1 feed connector) (for dimmable version to be combined with "DV1061") 244x68x38H	TA98100		
 DALI/0-10/1-10/PUSH SELV Interface 103x67x21H		DV1061	

Optional control devices - BLL wireless switch

 Device for switching and controlling Artemide App products. Max N.3 inputs for external push buttons. Max 1 m distance. Mains power supply required. To be installed inside flush mounting boxes or junction boxes.	DV1080APP
---	-----------

↪ TURN AROUND SMD TRACK

Titanium 		IP20
--------------	--	----------

Linear elements

Length
1000 mm
2000 mm
3000 mm


Code
TA10122
TA10222
TA10322



Angle elements

90° on same plane track angle elements
75 x 75 mm




Code
TA80122



Curved joining elements

Radius	Alpha
300 mm	45°
	60°
	90°
500 mm	45°
	60°
	90°
700 mm	45°
	60°
	90°

Code
TA40022
TA40322
TA40622
TA40122
TA40422
TA40722
TA40222
TA40522
TA40822



Accessories

	Fed end cap Cable L= 2500mm	
--	--------------------------------	--

Code
TA90700

	Ceiling bracket Kit (4pcs) Linear element L= 3000mm uses 4pcs Linear element L= 2000mm uses 3pcs Linear element L= 1000mm uses 1pcs	
--	--	--










Code
TA90400

	Electro-Mechanical Joint Kit	
--	------------------------------	--

Code
TA90200

White Titanium



Power supply	Undimmable Code	DALI/0-10/1-10/PUSH Code	Dimmable APP Code
 <p>240W Ceiling power supply kit for suspension and ceiling modules 230VAC-48VDC IP20 (1) (2) 400x110x50H</p>	<input type="radio"/> TA61301 <input checked="" type="radio"/> TA61522	<input type="radio"/> TA61401 <input checked="" type="radio"/> TA61622	<input type="radio"/> TA61401APP <input checked="" type="radio"/> TA61622APP
 <p>150W Ceiling power supply kit for suspension and ceiling modules 230VAC-48VDC IP20 (1) (2) 400x110x50H</p>	<input type="radio"/> TA60901 <input checked="" type="radio"/> TA61122	<input type="radio"/> TA61001 <input checked="" type="radio"/> TA61222	<input type="radio"/> TA61001APP <input checked="" type="radio"/> TA61222APP
 <p>240W Ceiling power supply kit for recessed and ceiling modules 230VAC-48VDC IP20 (1) (2) 400x110x50H</p>	<input type="radio"/> TA60501 <input checked="" type="radio"/> TA60722	<input type="radio"/> TA60601 <input checked="" type="radio"/> TA60822	<input type="radio"/> TA60601APP <input checked="" type="radio"/> TA60822APP
 <p>150W Ceiling power supply kit for recessed and ceiling modules 230VAC-48VDC IP20 (1) (2) 400x110x50H</p>	<input type="radio"/> TA60101 <input checked="" type="radio"/> TA60322	<input type="radio"/> TA60201 <input checked="" type="radio"/> TA60422	<input type="radio"/> TA60201APP <input checked="" type="radio"/> TA60422APP
 <p>320W Remote box power supply kit 230VAC-48VDC IP20 (1) (2) 313x243x57,5H</p>		TA68000	TA68000APP
 <p>240W Remote box power supply kit 230VAC-48VDC IP20 (1) (2) 313x243x57,5H</p>		TA62500	TA62500APP
 <p>240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (1) (2) (1 feed connector) (for dimmable version to be combined with "DV1061") 244x68x38H</p>	TA98000		
 <p>150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20 (1) (2) (1 feed connector) (for dimmable version to be combined with "DV1061") 244x68x38H</p>	TA98100		
 <p>DALI/0-10/1-10/PUSH SELV Interface 103x67x21H</p>		DV1061	

Optional control devices - BLL wireless switch



Device for switching and controlling Artemide App products.
Max N.3 inputs for external push buttons.
Max 1 m distance.
Mains power supply required.
To be installed inside flush mounting boxes or junction boxes.

DV1080APP

↪ TURN AROUND SUSPENSION DIRECT TRACK

Titanium



IP20



Linear elements

Length

1000 mm
2000 mm
3000 mm

Code

TA10122
TA10222
TA10322




Angle elements

90° on same plane track angle elements
75 x 75 mm

Code

TA80122



Curved joining elements

Radius Alpha

300 mm

45°

60°

90°

500 mm

45°

60°

90°

700 mm

45°

60°

90°

Code

TA40022

TA40322

TA40622

TA40122




TA40422

TA40722

TA40222

TA40522

TA40822



Accessories



Fed end cap
Cable L= 2500mm

Code

TA90600



Suspension Kit (3pcs)

Linear element L= 3000mm uses 3pcs
Linear element L= 2000mm uses 2pcs
Linear element L= 1000mm uses 2pcs

TA90500






















Electro-Mechanical Joint Kit

TA90300

White Titanium



Power supply	Undimmable Code	DALI/0-10/1-10/PUSH Code	Dimmable APP Code
 <p>320W Recessed power supply kit for suspension modules 230VAC-48VDC IP20  395x165x107H</p>	TA67001	TA67101	TA67101APP
 <p>240W Recessed power supply kit for suspension modules 230VAC-48VDC IP20  395x165x107H</p>	TA62301	TA62401	TA62401APP
 <p>150W Recessed power supply kit for suspension modules 230VAC-48VDC IP20  395x165x107H</p>	TA62101	TA62201	TA62201APP
 <p>240W Ceiling power supply kit for suspension and ceiling modules 230VAC-48VDC IP20  400x110x50H</p>	<input type="radio"/> TA61301 <input checked="" type="radio"/> TA61522	<input type="radio"/> TA61401 <input checked="" type="radio"/> TA61622	<input type="radio"/> TA61401APP <input checked="" type="radio"/> TA61622APP
 <p>150W Ceiling power supply kit for suspension and ceiling modules 230VAC-48VDC IP20  400x110x50H</p>	<input type="radio"/> TA60901 <input checked="" type="radio"/> TA61122	<input type="radio"/> TA61001 <input checked="" type="radio"/> TA61222	<input type="radio"/> TA61001APP <input checked="" type="radio"/> TA61222APP
 <p>320W Remote box power supply kit 230VAC-48VDC IP20  313x243x57,5H</p>		TA68000	TA68000APP
 <p>240W Remote box power supply kit 230VAC-48VDC IP20  313x243x57,5H</p>		TA62500	TA62500APP
 <p>240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20  (1 feed connector) (for dimmable version to be combined with "DV1061") 244x68x38H</p>	TA98000		
 <p>150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20  (1 feed connector) (for dimmable version to be combined with "DV1061") 244x68x38H</p>	TA98100		
 <p>DALI/0-10/1-10/PUSH SELV Interface 103x67x21H</p>		DV1061	

Optional control devices - BLL wireless switch



Device for switching and controlling Artemide App products.
Max N.3 inputs for external push buttons.
Max 1 m distance.
Mains power supply required.
To be installed inside flush mounting boxes or junction boxes.

DV1080APP


↪ TURN AROUND SUSPENSION DIRECT+INDIRECT TRACK

Titanium 	*Delivery time on demand	IP20
--------------	--------------------------	----------





Linear elements	Direct + Indirect
Length	Code
1000 mm	TA20122
2000 mm	TA20222
3000 mm	TA20322



Angle elements	Direct + Indirect
90° on same plane track angle elements	Code
75 x 75 mm	TA80222



Curved joining elements*	Direct + Indirect	
Radius	Alpha	
300 mm	45°	Code
	60°	TA50322
	90°	TA50622
500 mm	45°	TA50122
	60°	TA50422
	90°	TA50722
700 mm	45°	TA50222
	60°	TA50522
	90°	TA50822






















Accessories	Code
Fed end cap Cable L= 2500mm	TA90800

Suspension Kit (3pcs) Linear element L= 3000mm uses 3pcs Linear element L= 2000mm uses 2pcs Linear element L= 1000mm uses 2pcs	TA90500
---	---------


Electro-Mechanical Joint Kit	TA90300
------------------------------	---------


White Titanium



	Undimmable	DALI/0-10/1-10/PUSH	Dimmable APP
	Code	Code	Code
 <p>320W Recessed power supply kit for suspension modules 230VAC-48VDC IP20  395x165x107H</p>	TA67001	TA67101	TA67101APP
 <p>240W Recessed power supply kit for suspension modules 230VAC-48VDC IP20  395x165x107H</p>	TA62301	TA62401	TA62401APP
 <p>150W Recessed power supply kit for suspension modules 230VAC-48VDC IP20  395x165x107H</p>	TA62101	TA62201	TA62201APP
 <p>240W Ceiling power supply kit for suspension and ceiling modules 230VAC-48VDC IP20  400x110x50H</p>	<input type="radio"/> TA61301 <input checked="" type="radio"/> TA61522	<input type="radio"/> TA61401 <input checked="" type="radio"/> TA61622	<input type="radio"/> TA61401APP <input checked="" type="radio"/> TA61622APP
 <p>150W Ceiling power supply kit for suspension and ceiling modules 230VAC-48VDC IP20  400x110x50H</p>	<input type="radio"/> TA60901 <input checked="" type="radio"/> TA61122	<input type="radio"/> TA61001 <input checked="" type="radio"/> TA61222	<input type="radio"/> TA61001APP <input checked="" type="radio"/> TA61222APP
 <p>320W Remote box power supply kit 230VAC-48VDC IP20  313x243x57,5H</p>		TA68000	TA68000APP
 <p>240W Remote box power supply kit 230VAC-48VDC IP20  313x243x57,5H</p>		TA62500	TA62500APP
 <p>240W Bare power supply + plug ON-OFF 230VAC-48VDC IP20  (1 feed connector) (for dimmable version to be combined with "DV1061") 244x68x38H</p>	TA98000		
 <p>150W Bare power supply + plug ON-OFF 230VAC-48VDC IP20  (1 feed connector) (for dimmable version to be combined with "DV1061") 244x68x38H</p>	TA98100		
 <p>DALI/0-10/1-10/PUSH SELV Interface 103x67x21H</p>		DV1061	

Optional control devices - BLL wireless switch

 <p>Device for switching and controlling Artemide App products. Max N.3 inputs for external push buttons. Max 1 m distance. Mains power supply required. To be installed inside flush mounting boxes or junction boxes.</p>	DV1080APP
--	-----------

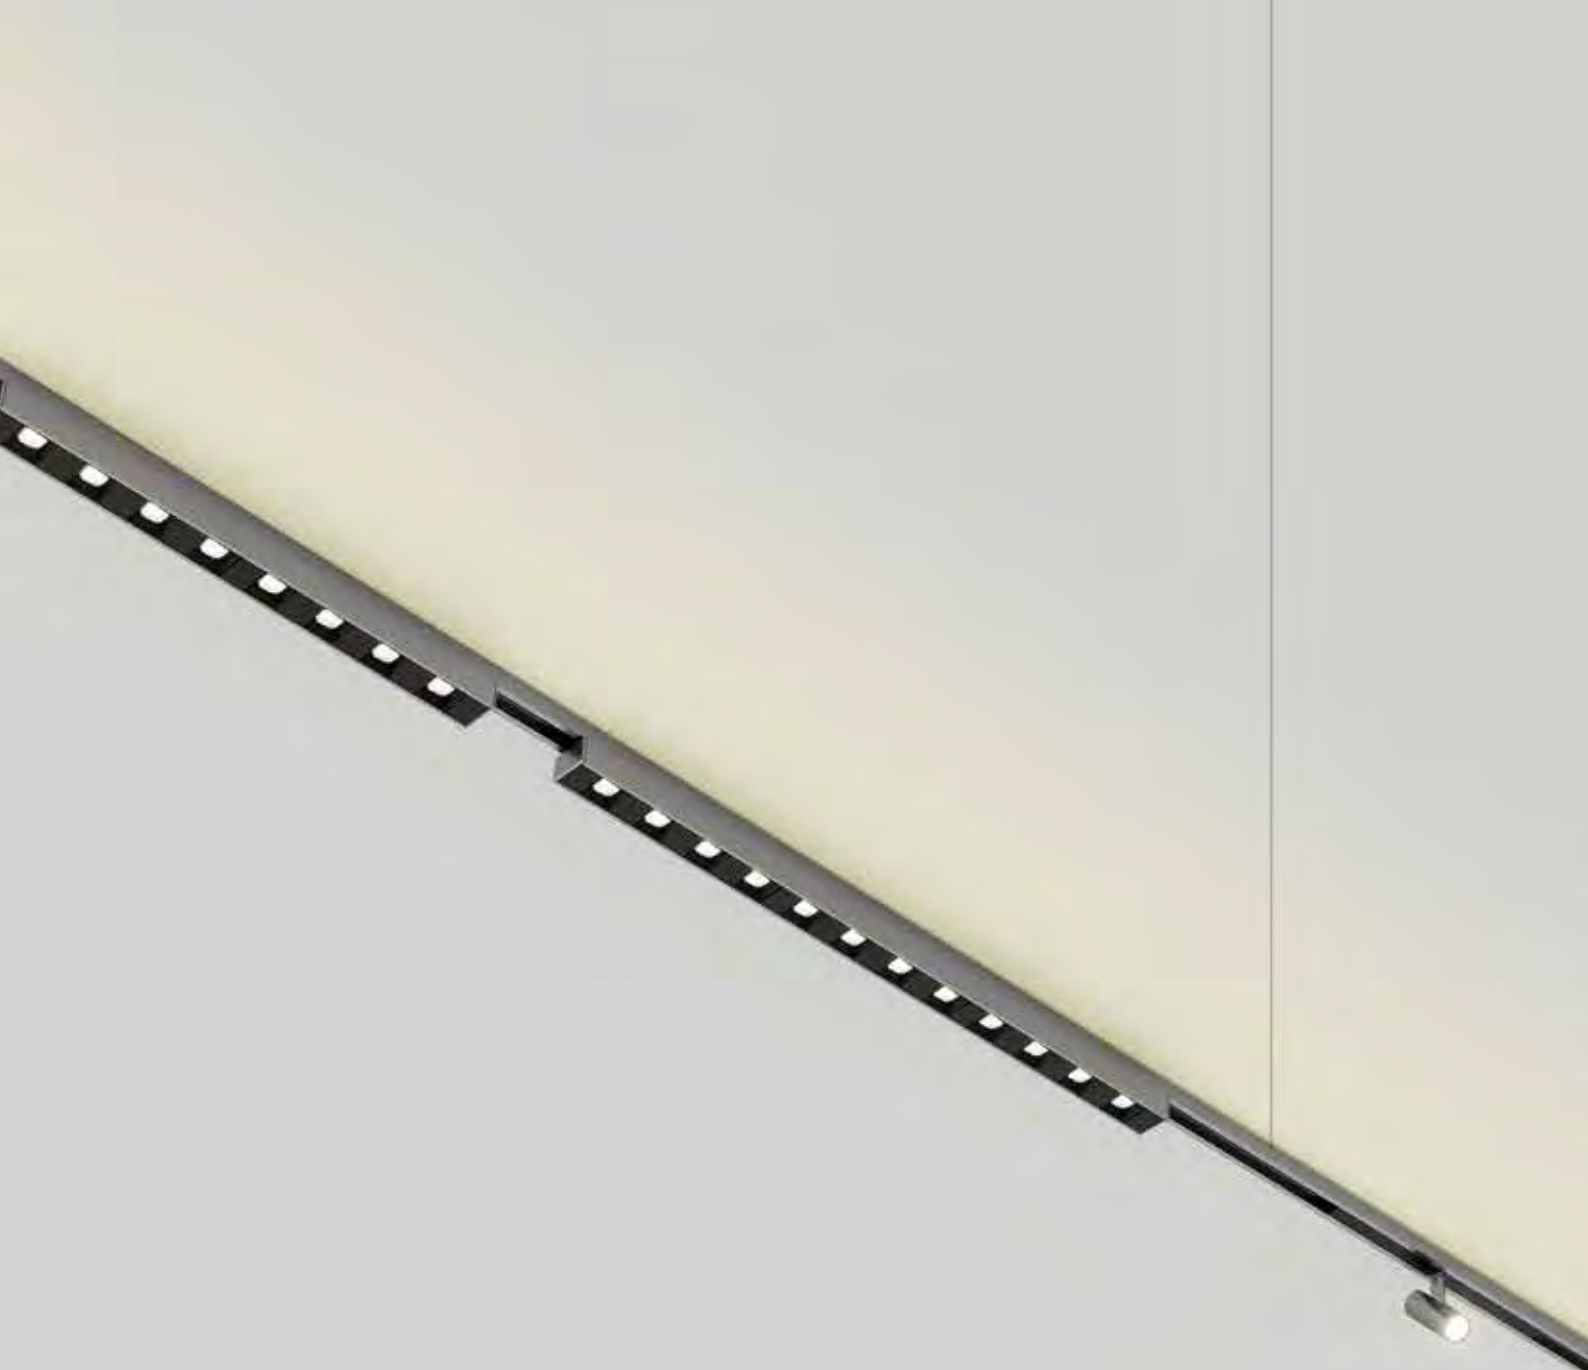

Turn Around lighting appliances



Vector Turn Around





↪ VECTOR TURN AROUND

Titanium



S

F

WF



MacAdam 3SDCM
CRI = 90


IP20



Vector 20				Dimmable
W	Beam	Flux	CCT	Code
3,5 W	S 10°	179 lm	2700K	TB00122
		188 lm	3000K	TB01122
		184 lm	4000K	TB03122
3,5 W	F 24°	171 lm	2700K	TB00222
		180 lm	3000K	TB01222
		189 lm	4000K	TB03222
3,5 W	WF 32°	168 lm	2700K	TB00322
		177 lm	3000K	TB01322
		186 lm	4000K	TB03322



Life L90 (6K) >36300h



Vector 30				Dimmable
W	Beam	Flux	CCT	Code
6,5 W	S 12°	307 lm	2700K	TB10122
		329 lm	3000K	TB11122
		329 lm	4000K	TB13122
7 W	F 16°	313 lm	2700K	TB10222
		335 lm	3000K	TB11222
		335 lm	4000K	TB13222
7 W	WF 30°	254 lm	2700K	TB10322
		272 lm	3000K	TB11322
		272 lm	4000K	TB13322



Life L90 (10K) >60500h



↪ VECTOR TURN AROUND

Titanium



S F WF



MacAdam 3SDCM
CRI = 90

IP20




Vector 40

W	Beam	Flux	CCT	Code
10 W	S 13°	544 lm	2700K	TB20122
		541 lm	3000K	TB21122
		541 lm	4000K	TB23122
	F 20°	543 lm	2700K	TB20222
		584 lm	3000K	TB21222
		626 lm	4000K	TB23222
	WF 28°	491 lm	2700K	TB20322
		529 lm	3000K	TB21322
		566 lm	4000K	TB23322



Life L90 (10K) 60500h




Vector 40

Code

AP90100



Accessories holder




Lens for elliptical emission

AP90200



Soft filter

AP90300



Anti-dazzle louvre

Code

AP90400

↪ VECTOR PENDANT TURN AROUND


Titanium



S

F

WF




MacAdam 3SDCM
CRI = 90

IP20

Vector 30 Pendant


W	Beam	Flux	CCT	Dimmable Code
6,5 W	S 12°	307 lm	2700K	TB30122
		329 lm	3000K	TB31122
		329 lm	4000K	TB33122
7 W	F 16°	313 lm	2700K	TB30222
		335 lm	3000K	TB31222
		335 lm	4000K	TB33222
	WF 30°	254 lm	2700K	TB30322
		272 lm	3000K	TB31322
		272 lm	4000K	TB33322



Life L90 (10K) 60500h

Vector 40 Pendant

W	Beam	Flux	CCT	Dimmable Code
10 W	S 13°	544 lm	2700K	TB40122
		541 lm	3000K	TB41122
		541 lm	4000K	TB43122
F 20°	543 lm	2700K	TB40222	
	584 lm	3000K	TB41222	
	626 lm	4000K	TB43222	
WF 28°	491 lm	2700K	TB40322	
	529 lm	3000K	TB41322	
	566 lm	4000K	TB43322	




Life L90 (10K) 60500h



↪ SHARP TURN AROUND

Titanium F WF MacAdam 2SDCM IP20
CRI = 90

Sharp 8x					Dimmable
	W	Beam	Flux	CCT	Code
8 LED	14 W	F 26°	1071 lm	2700K	TB50222
			1071 lm	3000K	TB51222
			1147 lm	4000K	TB53222
	XF 62°	1139 lm	2700K	TB50422	
		1139 lm	3000K	TB51422	
		1219 lm	4000K	TB53422	



Sharp 12x					Dimmable
	W	Beam	Flux	CCT	Code
12 LED	19 W	F 26°	1607 lm	2700K	TB60222
			1607 lm	3000K	TB61222
			1720 lm	4000K	TB63222
	XF 62°	1708 lm	2700K	TB60422	
		1708 lm	3000K	TB61422	
		1829 lm	4000K	TB63422	



Sharp Turn Around



↪ DIFFUSED LINEAR MODULES TURN AROUND



Titanium




MacAdam 2SDCM
CRI = 90

IP20

Diffused linear module				Dimmable
	W	Flux	CCT	Code
600 mm	15 W	1255 lm	2700K	TD21022
		1313 lm	3000K	TD22022
		1374 lm	4000K	TD24022
1200 mm	30 W	2510 lm	2700K	TD31022
		2626 lm	3000K	TD32022
		2748 lm	4000K	TD34022

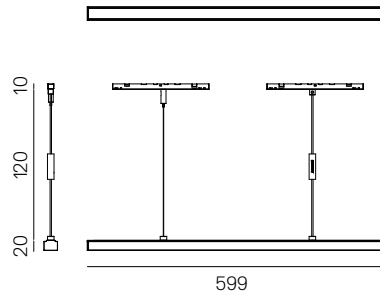

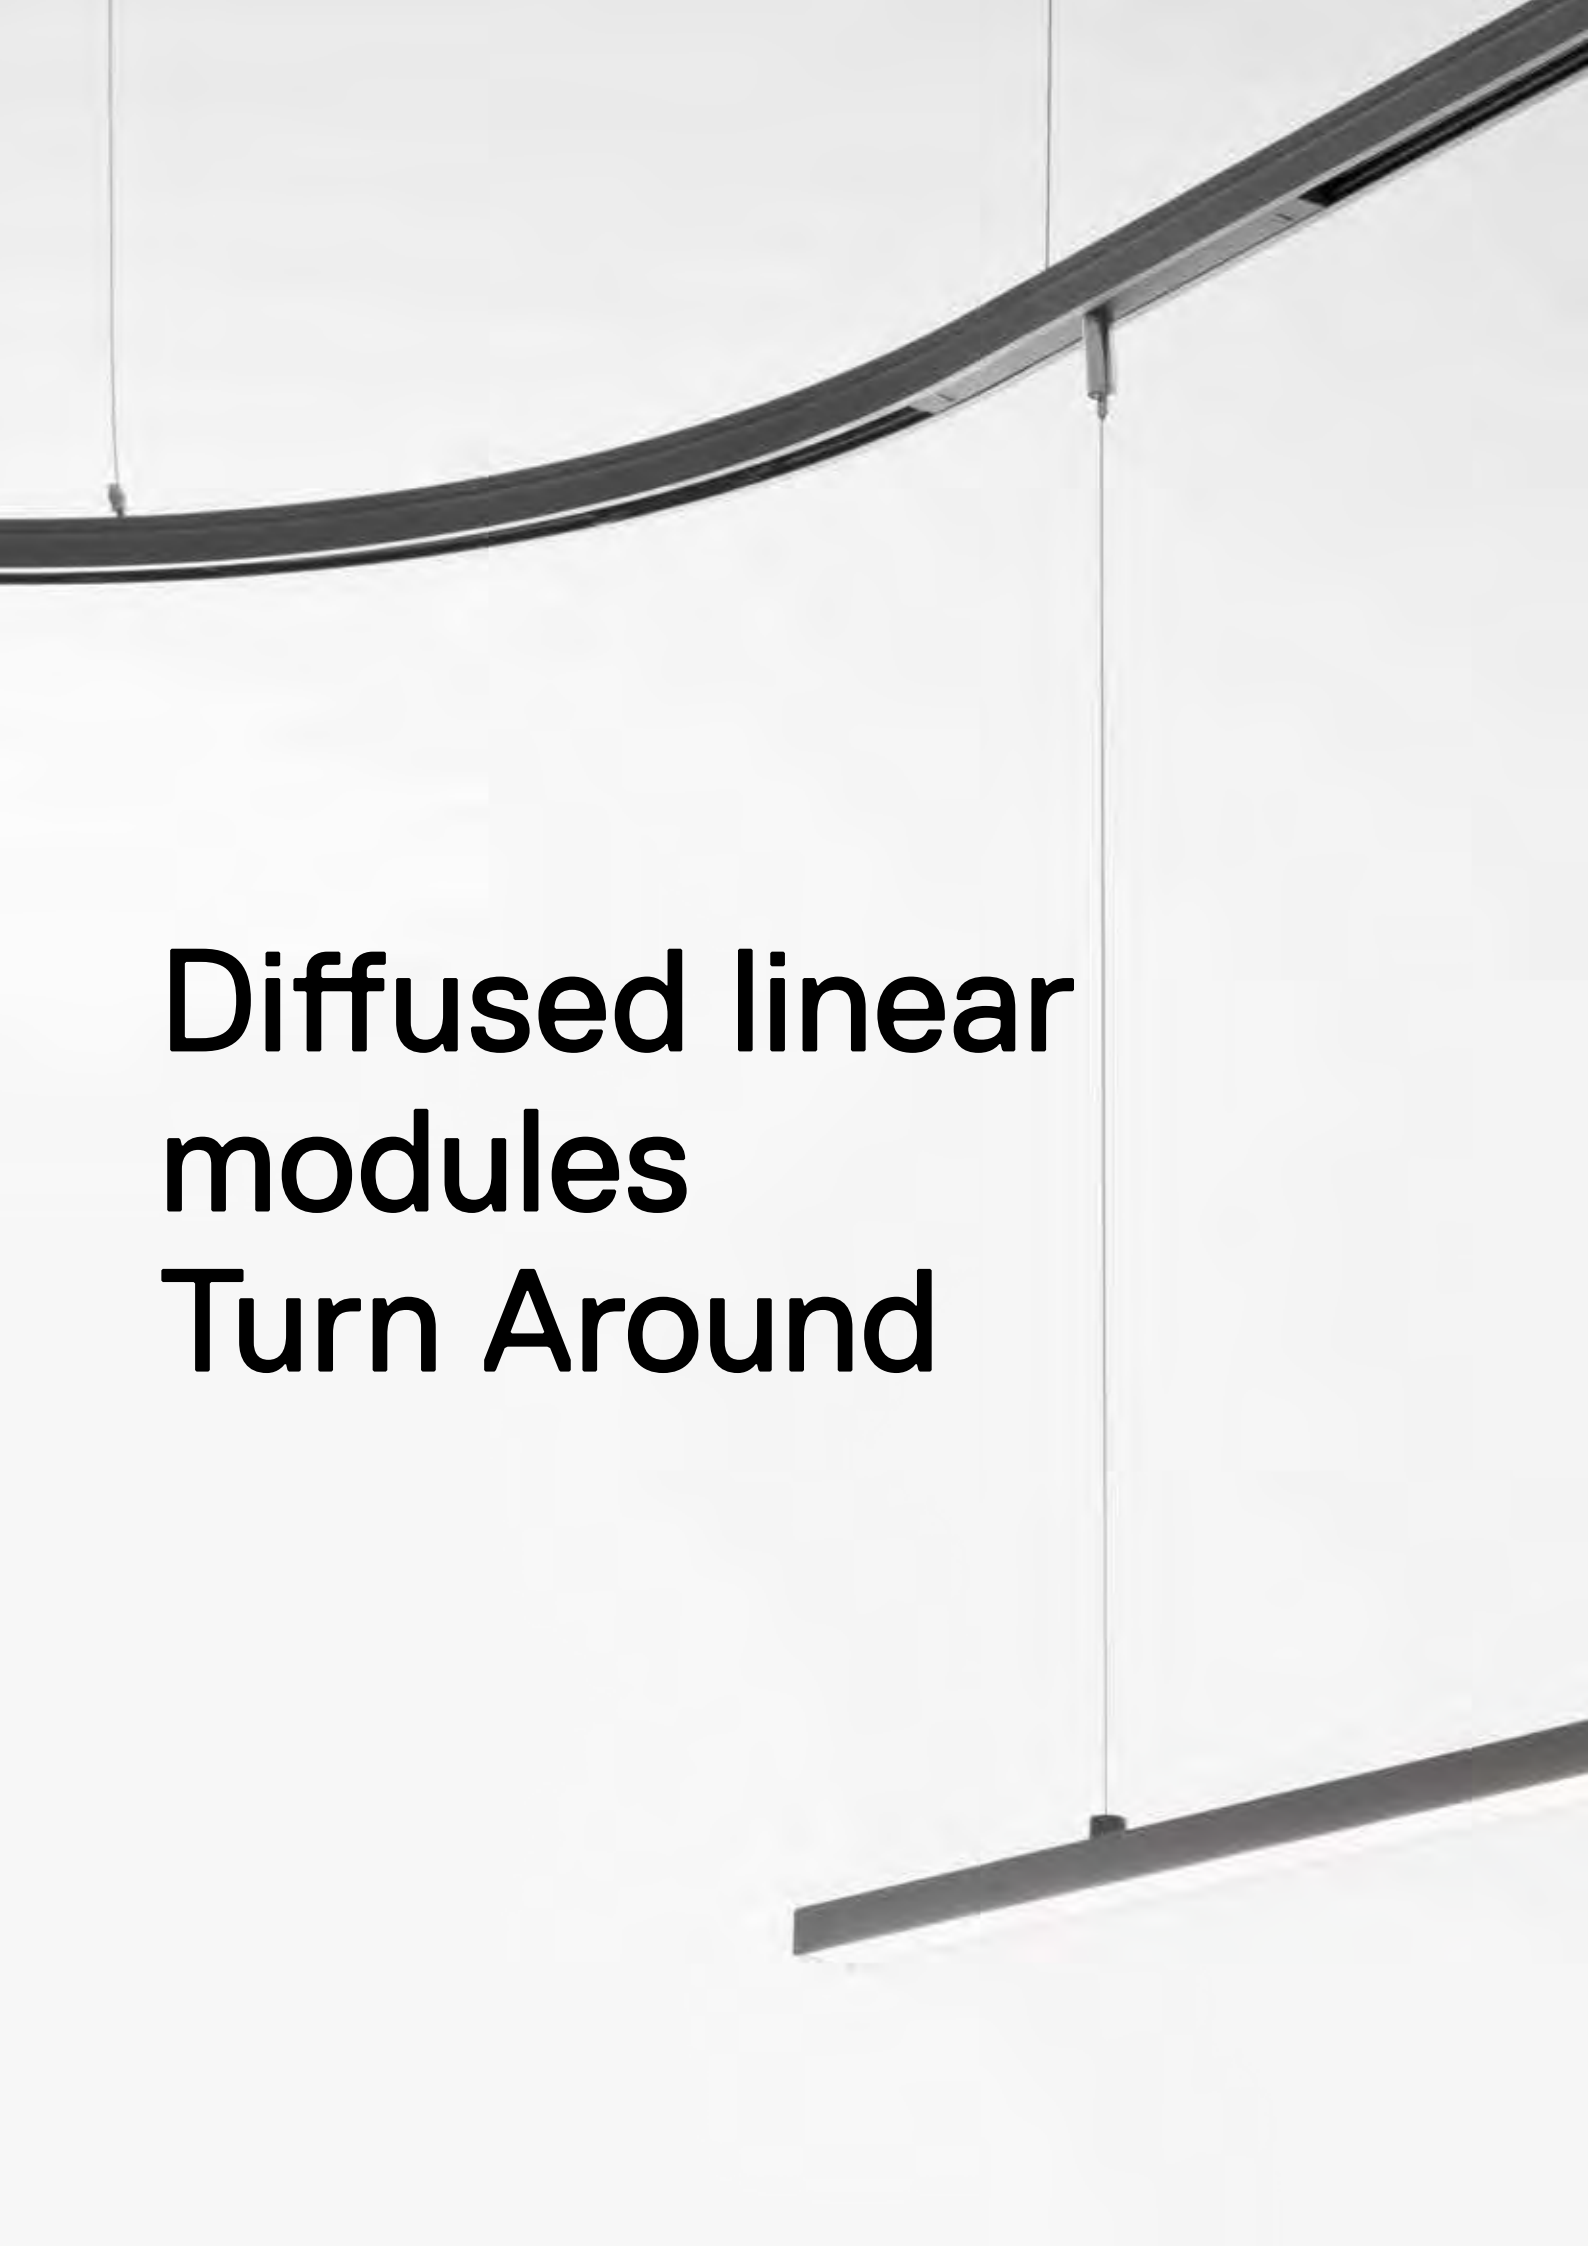

**Diffused linear
modules
Turn Around**

Diffused flexible modules Turn Around

Diffused flexible modules*				Dimmable
	W	Flux	CCT	Code
2000mm	18 W	1000 lm	3000K	TB91922
4500 mm	39 W	2252 lm	3000K	TB90922



* The adapter of the diffused flexible module can be fixed only in linear module.




Square modules Turn Around

Horizontal square diffused

W	Flux	CCT
18 W	1000 lm	3000K


Dimmable
Code
TB81922

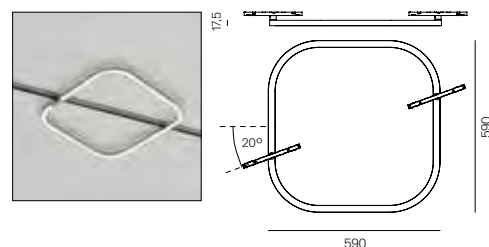

Vertical square diffused


W	Flux	CCT
18 W	1000 lm	3000K

Dimmable
Code
TB71922

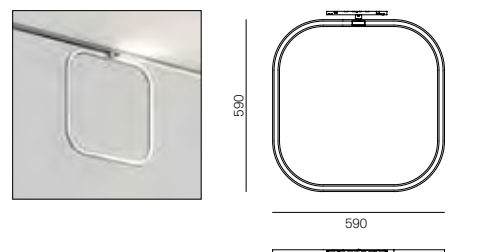


Horizontal square track*

Code
TB99922

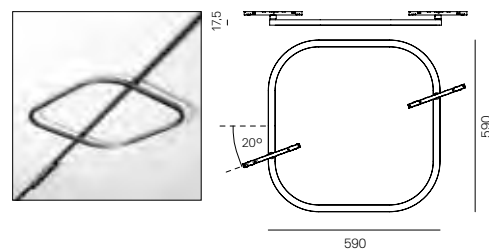

*Insets horizontal square track



Insets

Vector 20 Track	
Vector 30 Track	
Vector 40 Track	
Vector 30 Pendant Track	
Vector 40 Pendant Track	
Sharping 8x	
Sharping 12x	
Strip LED	

N° Max

3
3
3
3
3
3
X
X










Turn Around is inclusive



↪ LIGHTING APPLIANCES TURN AROUND


GOPLÉ MINI PENDANT TURN AROUND, BIG - BJARKE INGLES GROUP

W	Flux	CCT	Dimmable Code
11 W	720 lm	2700K	TC10401
		3000K	TC11401

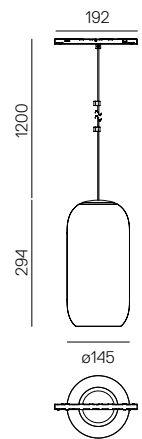


GOPLÉ 60 PENDANT TURN AROUND, BIG - BJARKE INGLES GROUP

W	Colour	Beam	Flux	CCT	Dimmable Code
10 W	Black	S 13°	557 lm	2700K	TC50104
			557 lm	3000K	TC51104
			557 lm	4000K	TC53104
		F 20°	556 lm	2700K	TC50204
			598 lm	3000K	TC51204
			641 lm	4000K	TC53204
		WF 28°	503 lm	2700K	TC50304
			542 lm	3000K	TC51304
			580 lm	4000K	TC53304

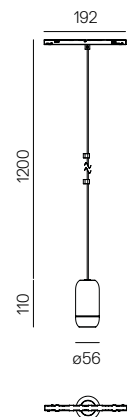

GOPLÉ 80 PENDANT TURN AROUND, BIG - BJARKE INGLES GROUP

W	Colour	Beam	Flux	CCT	Dimmable Code
24 W	Black	S 16°	1698 lm	2700K	TC40104
			1767 lm	3000K	TC41104
			1795 lm	4000K	TC43104
		F 22°	1716 lm	2700K	TC40204
			1786 lm	3000K	TC41204
			1488 lm	4000K	TC43204
		WF 32°	1782 lm	2700K	TC40304
			1854 lm	3000K	TC41304
			1883 lm	4000K	TC43304

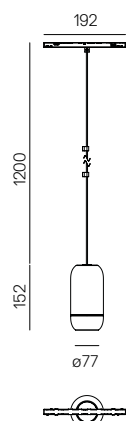




↪ LIGHTING APPLIANCES TURN AROUND



SPHERE 9 PENDANT TURN AROUND

W	Flux	CCT	Dimmable
4 W	346 lm	2700K	Code
	373 lm	3000K	TC30406
			TC31406

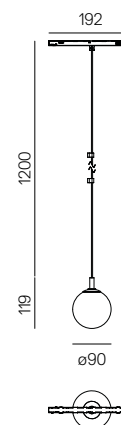

SPHERE 14 PENDANT TURN AROUND

W	Flux	CCT	Dimmable
8,5 W	628 lm	2700K	Code
	677 lm	3000K	TC20406
			TC21406

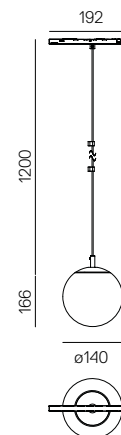




↪ LIGHTING APPLIANCES TURN AROUND


ORSA 21 PENDANT TURN AROUND, FOSTER + PARTNERS

W	Flux	CCT	Dimmable
8 W	525 lm	2700K	Code
	562 lm	3000K	TC60404
			TC61404

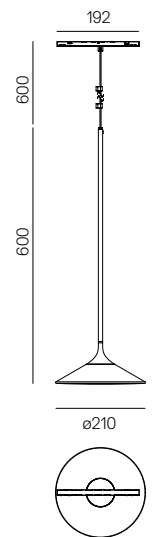

UNTERLINDEN PENDANT TURN AROUND, HERZOG & DE MEURON

W	Colour	Flux	CCT	Dimmable
7 W	Brass	339 lm	2700K	Code
	Aluminum			TC70406
	Brass	349lm	3000K	TC71406
	Aluminum			TC71407

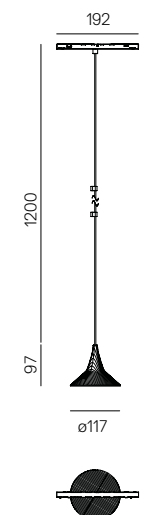




↳ LIGHTING APPLIANCES TURN AROUND

DISCOVERY 70 VERTICAL PENDANT TURN AROUND, ERNESTO GISMONDI

W	Colour	Flux	CCT	Dimmable Code
29 W	Black	2317 lm	3000K	TC01404

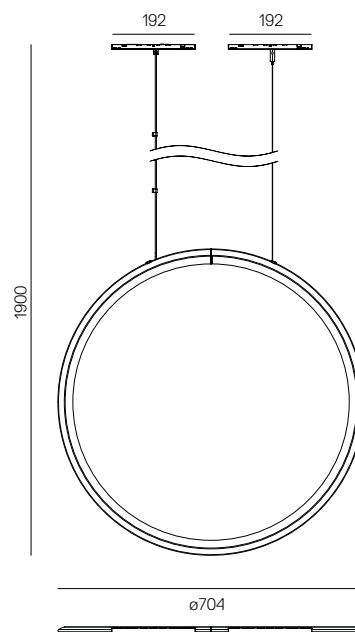



Turn Around is INTEGRALIS®





Turn Around is INTEGRALIS®

INTEGRALIS® is an innovative light, perfectly integrated into the products of the Artemide collections, that sanitizes spaces.

INTEGRALIS® combines sanitizing efficacy with luminous performance and design beauty.

It also integrates itself in both the environments and moments of life by interpreting the rhythms and needs of mankind.

INTEGRALIS® is managed by Artemide App, a digital interaction system accessible to all.

INTEGRALIS® was born from Artemide's scientific and technological research and humanistic and social vision.

INTEGRALIS® is a project that associates and integrates the visible and invisible spectral range in an innovative formula capable of regenerating the environmental qualities of the space.

PATENT PENDING

White INTEGRALIS



Violet INTEGRALIS



INTEGRALIS[®]

A light for a safe environment



Discover INTEGRALIS[®] collection on [artemide.com](https://www.artemide.com)

Headquarters

Artemide S.p.A.

Via Bergamo, 18
20006 Pregnana Milanese (MI), Italy
Tel. +39 02 93518.1
Tel. +39 02 93526.1
Numero verde 800 834 093
(from Italy only)
info@artemide.com
artemide.com

Artemide S.p.A.

si riserva la facoltà di modificare, in qualunque momento e senza preavviso, le caratteristiche tecniche degli elementi illustrati nel presente catalogo.

Artemide S.p.A.

reserves the right to change, at any time and without prior warning, the technical specifications of any product illustrated in this catalogue.

Artemide S.p.A.

se réserve le droit de modifier, à n'importe quel moment et sans préavis, les caractéristiques techniques des éléments illustrés dans ce catalogue.

Artemide S.p.A.

behält sich das Recht vor jederzeit und ohne Ankündigung die technischen Daten der im Katalog abgebildeten Produkte zu ändern.

Artemide S.p.A.

se reserva la facultad de modificar, en cualquier y sin aviso previo, las características técnicas de los elementos ilustrados en el presente catálogo.

2022 09 updated version. V.3

Artemide[®]

artemide.com
2022 10 version